

ARMORED FTTH PATCHCORD

Reinforced with metal armor
LSZH
Bend insensitive fiber

ARMORED FTTH PATCHCORD


Reinforced cable with helical metal armor. This type of manufacture guarantees excellent crush resistance as well as direct traction and makes it suitable for home connections, between the user boss and the device.



TECHNICAL SPECIFICATIONS

TYPE FIBER	SM-9/125 ITU-T G657 A
CABLE DIAMETER	Ø 3,0 mm
EXTERNAL SHEATH	LSZH
EXTERNAL SHEATH THICKNESS	0.45 mm
METAL REINFORCEMENT	Steel SUS 304
MINIMUM RADIUS CURVATURE	15 x Ø att. ≤0,03 dB
TRACTION RESISTANCE	250 N att. ≤0,01db/km
CRUSHING	3000 N/100mm att. ≤0,01db/km
TEMPERATURE (° C)	- 40 / + 60
WEIGHT	11,4 Kg/Km

PRODUCT DETAILS

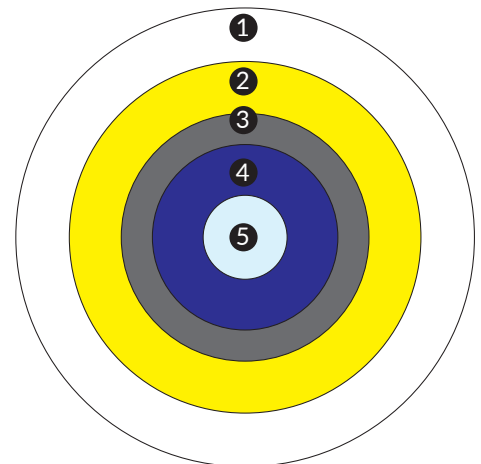

- 1 - Outer Sheath - LSZH
- 2 - Aramid yarns
- 3 - Helicoidal armor
- 4 - Acrylate
- 5 - Optical fiber