


FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:59 PM

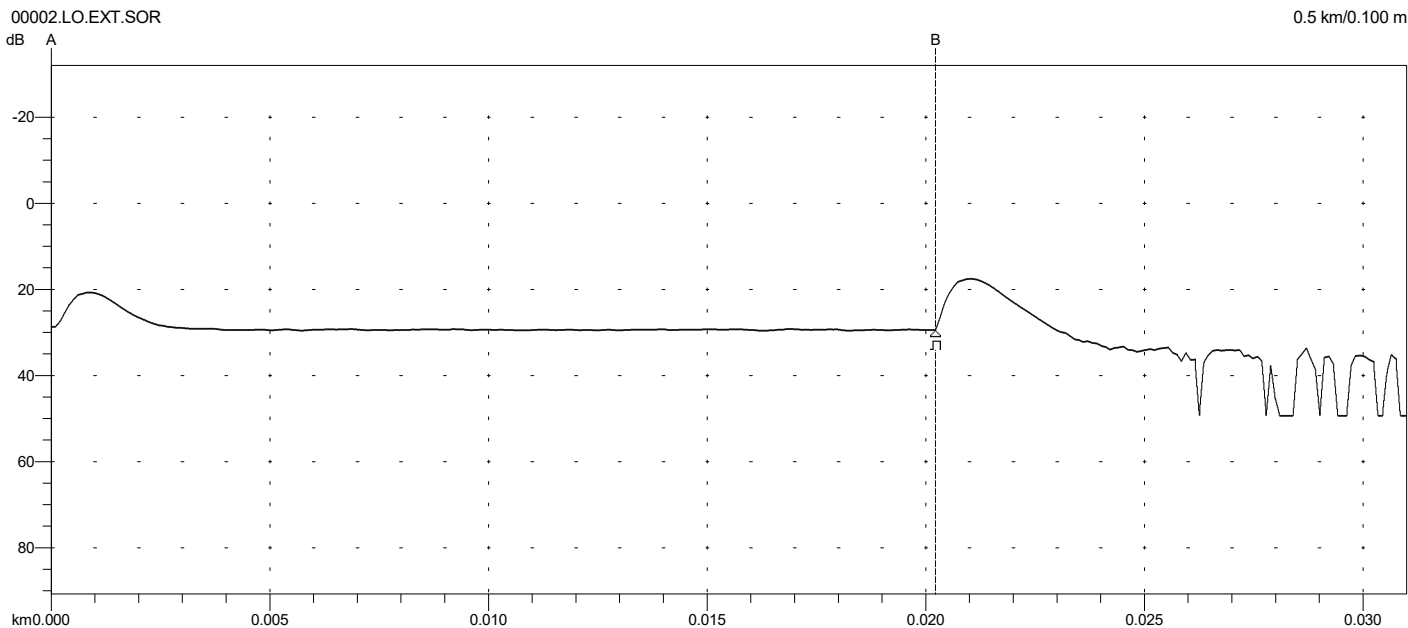

A: 0.0000 km	Index: 1.468200	[H] 3ns / 0.3m
B: 0.0202 km	2-Point Loss: 0.777 dB	Avg: Fast 13312
A -> B: 0.0202 km	Reflectance: N/A	/1550 nm/SM

Analysis Results -- 00002.LO.EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.79 39.103	>3.00	>-52.88

Overall (End-to-End) Loss: 0.79 dB

```


Primary Trace: 00002.LO.EXT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 03:07 PM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Horz. Shift: 0.0000 km
Loss: 0.06 dB     Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:59 PM

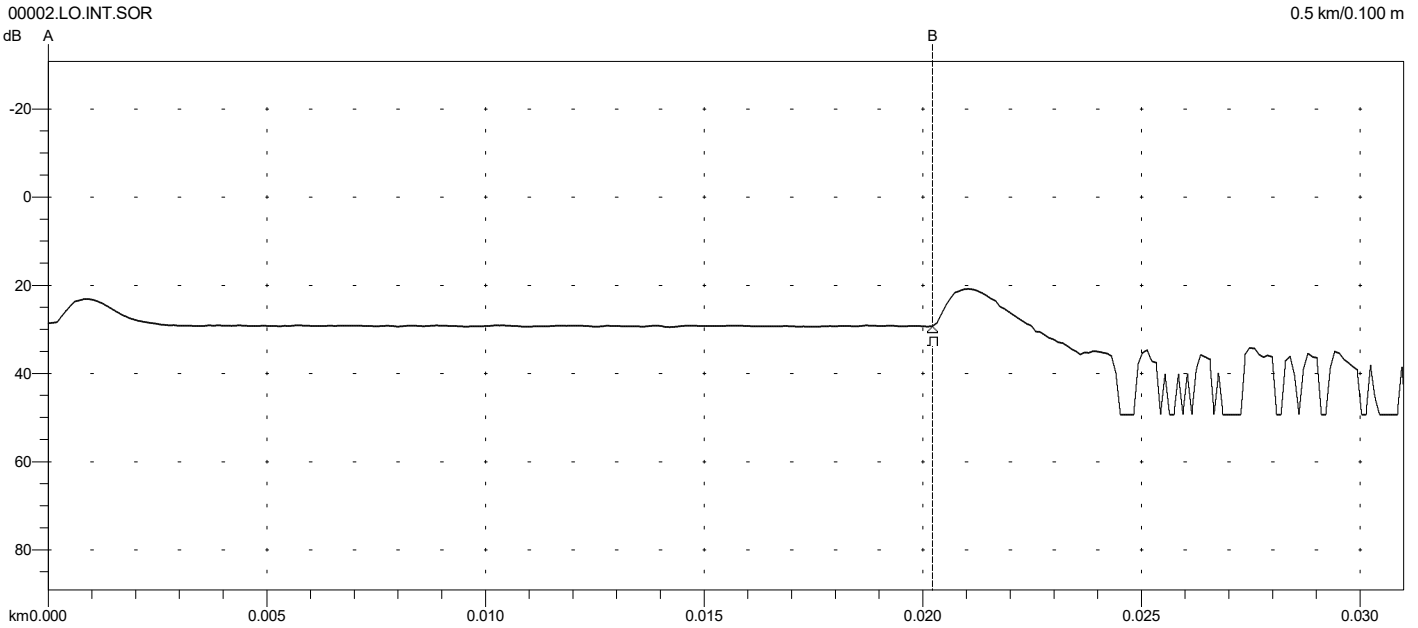

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: 0.651 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	---	--

Analysis Results -- 00002.LO.INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.57 28.408	>3.00	>-59.86

Overall (End-to-End) Loss: 0.57 dB

```

Primary Trace: 00002.LO.INT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 03:11 PM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Horz. Shift: 0.0000 km
Loss: 0.06 dB     Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----


Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:03 PM

00024.LO.EXT.SOR

0.5 km/0.100 m

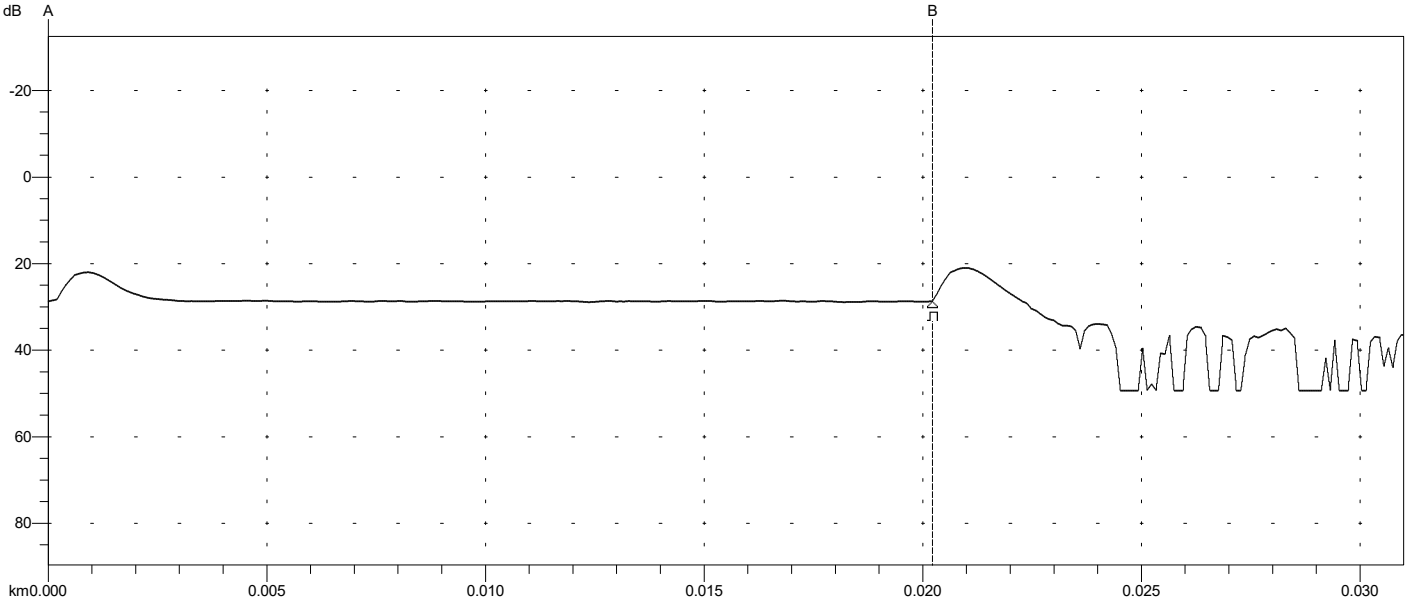

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: -0.063 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	--	--

Analysis Results -- 00024.LO.EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	-0.00 -0.066	>3.00	>-61.31

Overall (End-to-End) Loss: -0.00 dB

```


Primary Trace: 00024.LO.EXT.SOR
Date: 07/28/23           Range: 0.5 km
Time: 10:42 AM          Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:             Index: 1.468200
Fiber Type: Singlemode   WaveLength: 1550 nm
FAS Thresholds:         Horz. Shift: 0.0000 km
Loss: 0.06 dB           Vert. Shift: 0.00 dB
Reflectance: -60.00 dB  No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50     Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

```

----- Page 1 -----
| Language: IT           |
| Cable ID:              |
| Fiber ID: 1           |
| Wavelength: 1550     |
| Org. Loc:             |
| Term. Loc:            |
| Cable Code:           |
| Condition: OT        |
| Operator:             |
| Comment:              |
| Supplier: Anritsu    |
| OTDR Model: MT9085B-055 |
| S/N: 6272458690     |
| Optics Mod:          |
| S/N:                  |
| S/W Rev.: 2.00      |
| Other:                |
|-----|
    
```

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:04 PM

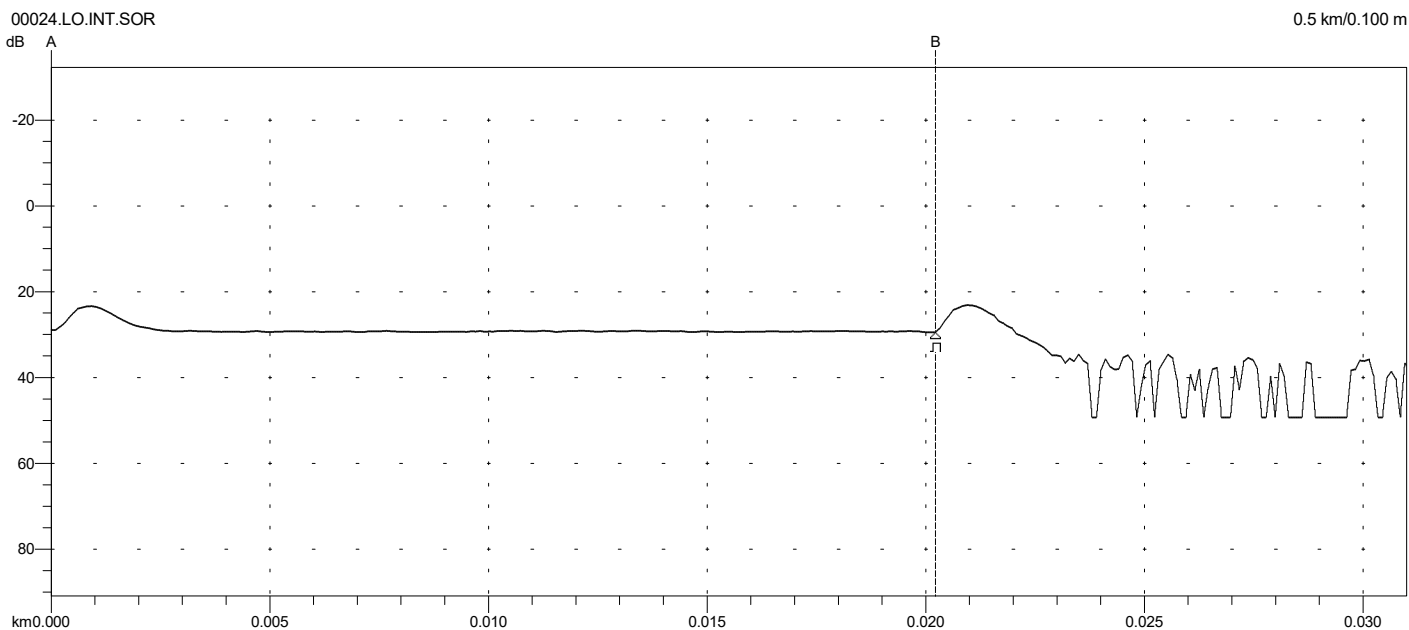

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: 0.524 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	---	--

Analysis Results -- 00024.LO.INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.69 34.060	>3.00	>-64.37

Overall (End-to-End) Loss: 0.69 dB

```

Primary Trace: 00024.LO.INT.SOR
Date: 07/28/23      Range:      0.5 km
Time: 10:44 AM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Horz. Shift: 0.0000 km
Loss: 0.06 dB     Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other: