


FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:59 PM

00003.LO.EXT.SOR

0.5 km/0.100 m

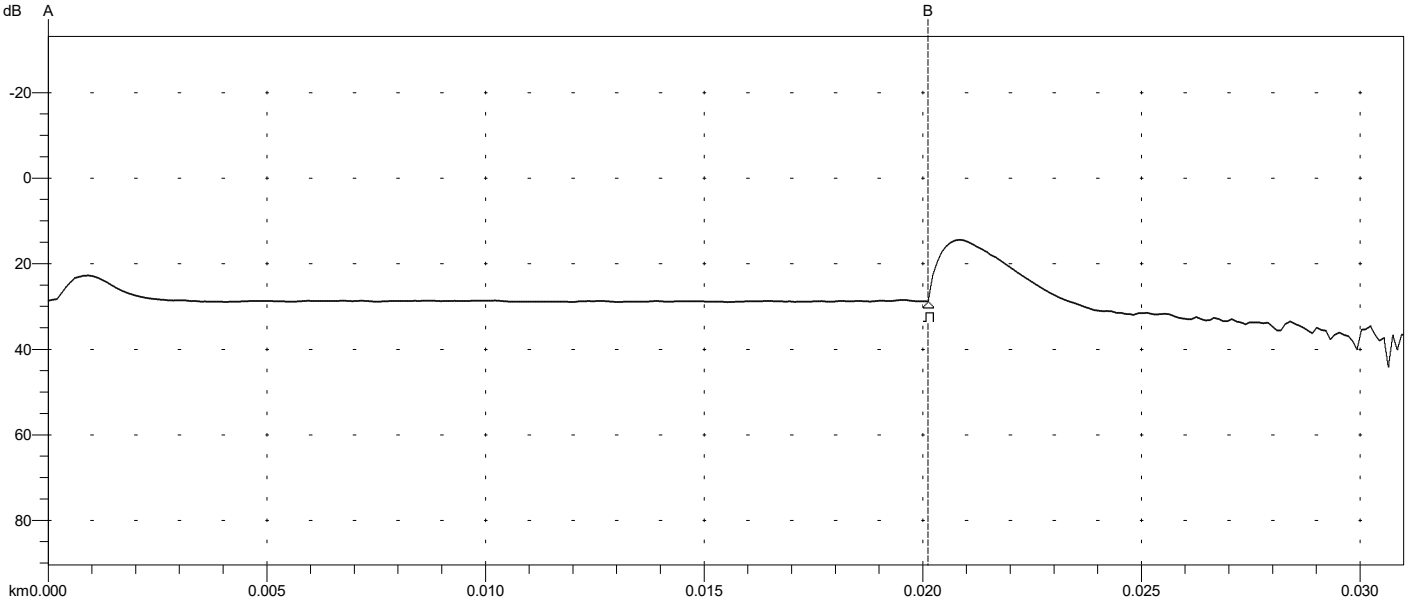

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: 0.079 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	---	--

Analysis Results -- 00003.LO.EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.08 3.975	>3.00	>-48.03

Overall (End-to-End) Loss: 0.08 dB

```


Primary Trace: 00003.LO.EXT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 03:29 PM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:59 PM

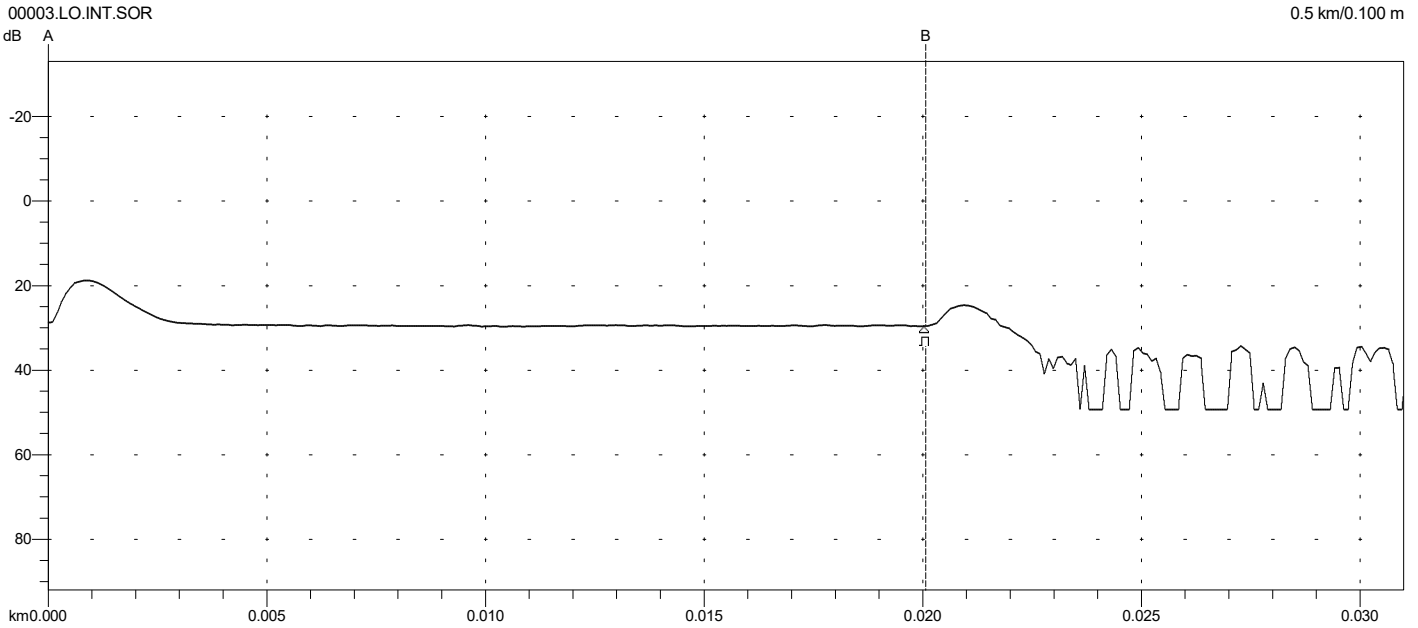

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: 0.843 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	---	--

Analysis Results -- 00003.LO.INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0200	0.83 41.533	>3.00	>-67.30

Overall (End-to-End) Loss: 0.83 dB

```

Primary Trace: 00003.LO.INT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 03:31 PM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Horz. Shift: 0.0000 km
Loss: 0.06 dB     Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----


Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:04 PM

00025.LO.EXT.SOR

0.5 km/0.100 m

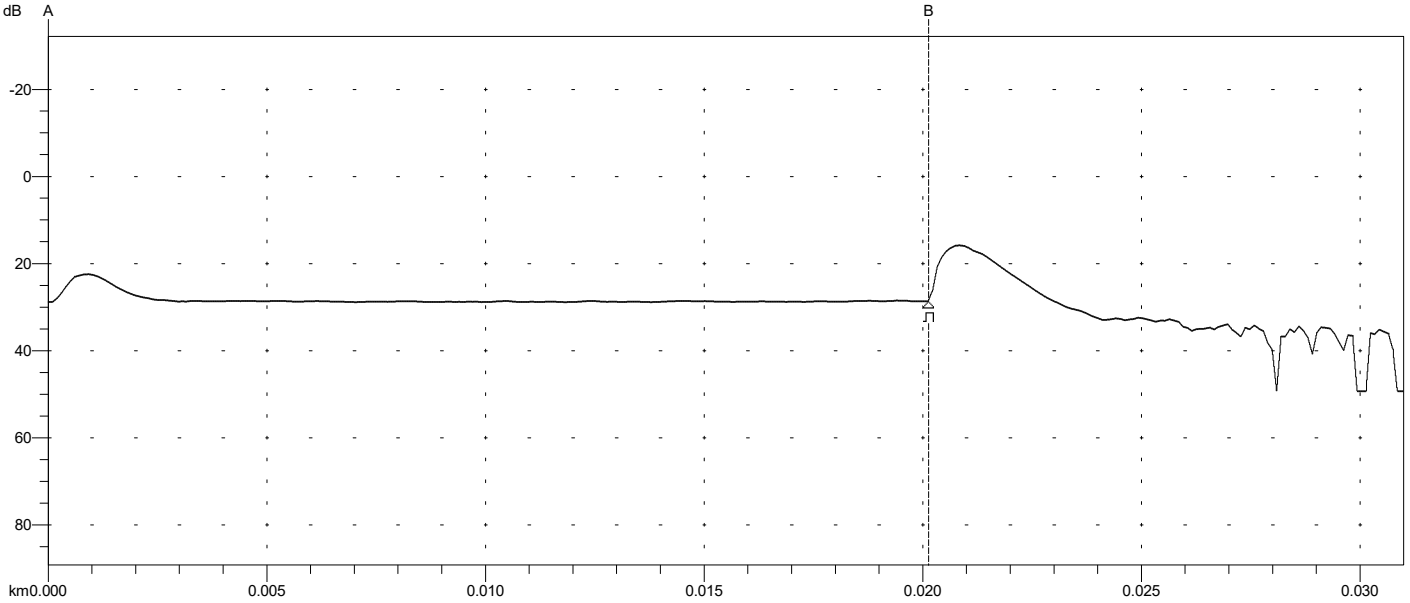

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: -0.259 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	--	--

Analysis Results -- 00025.LO.EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	-0.05 -2.733	>3.00	>-51.11

Overall (End-to-End) Loss: -0.05 dB

```


Primary Trace: 00025.LO.EXT.SOR
Date: 07/28/23           Range: 0.5 km
Time: 10:37 AM          Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:             Index: 1.468200
Fiber Type: Singlemode  WaveLength: 1550 nm
FAS Thresholds:         Horz. Shift: 0.0000 km
Loss: 0.06 dB           Vert. Shift: 0.00 dB
Reflectance: -60.00 dB  No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50     Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

```

----- Page 1 -----
| Language: IT           |
| Cable ID:             |
| Fiber ID: 1           |
| Wavelength: 1550     |
| Org. Loc:            |
| Term. Loc:           |
| Cable Code:          |
| Condition: OT        |
| Operator:            |
| Comment:             |
| Supplier: Anritsu    |
| OTDR Model: MT9085B-055 |
| S/N: 6272458690     |
| Optics Mod:          |
| S/N:                 |
| S/W Rev.: 2.00      |
| Other:               |
|-----|
    
```

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:04 PM

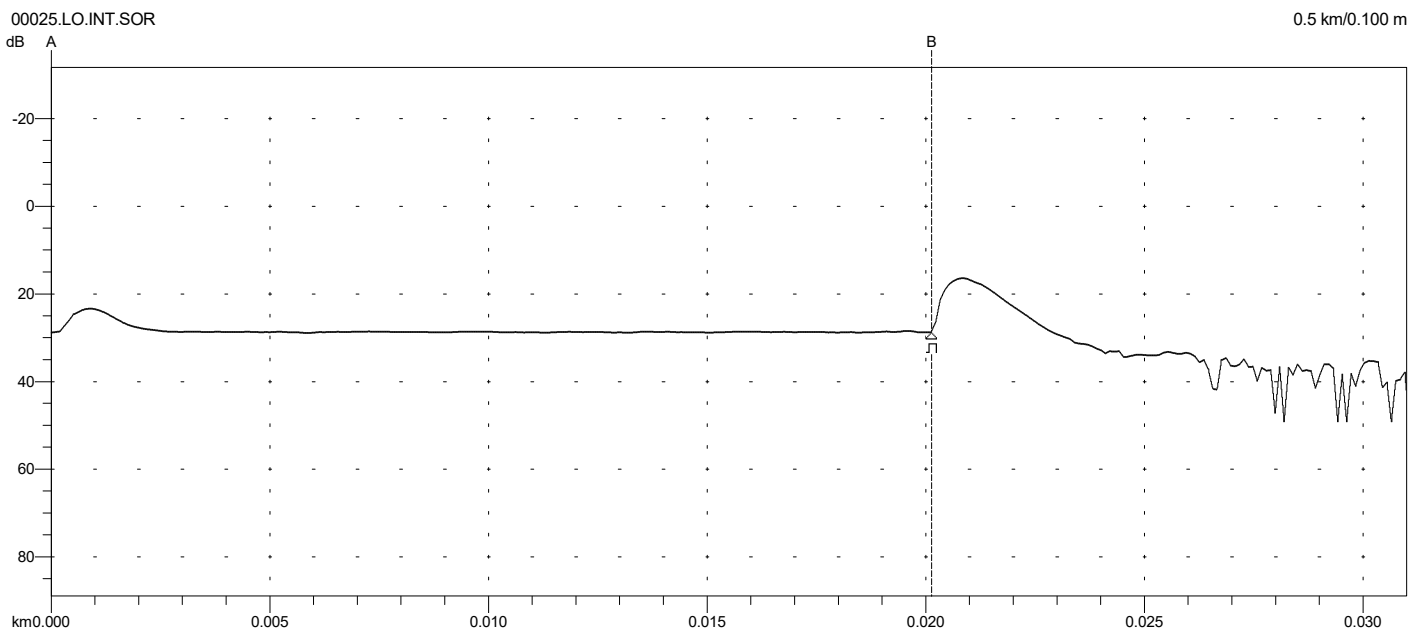

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: -0.198 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	--	--

Analysis Results -- 00025.LO.INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	-0.03 -1.441	>3.00	>-52.07

Overall (End-to-End) Loss: -0.03 dB

```

Primary Trace: 00025.LO.INT.SOR
Date: 07/28/23 Range: 0.5 km
Time: 10:39 AM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other: