


FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:50 PM

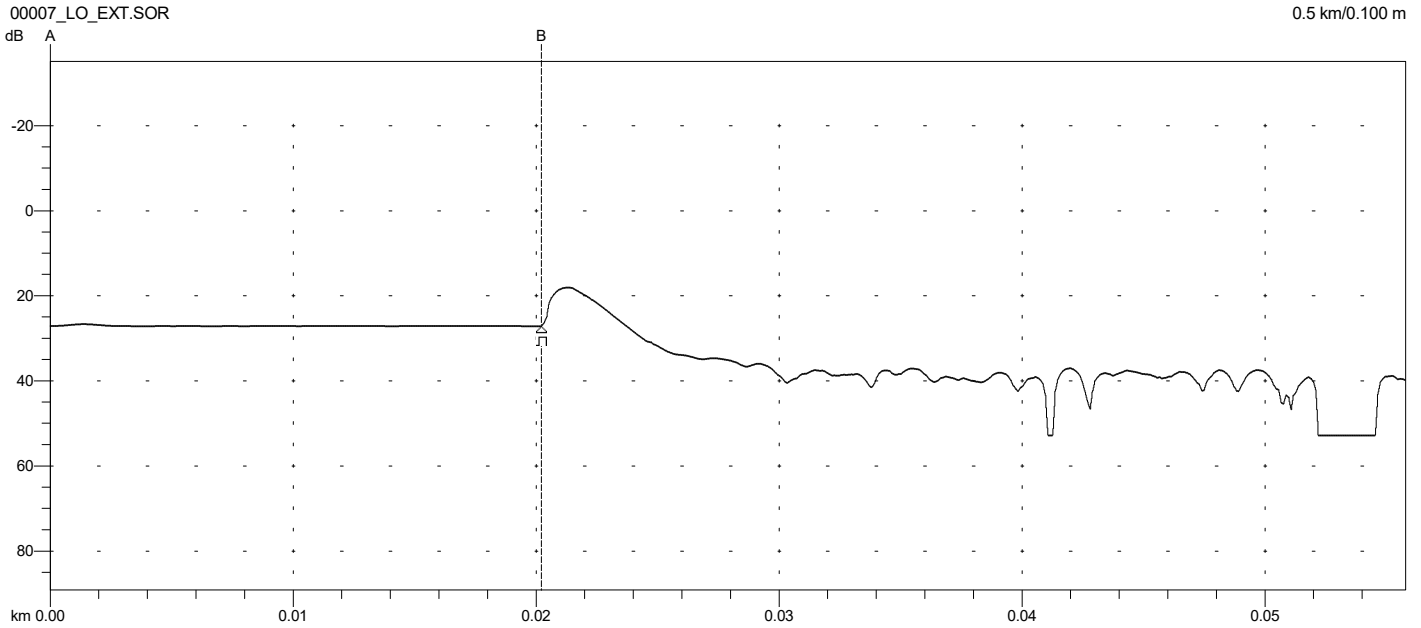

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: 0.025 dB Reflectance: N/A	[H] 10ns / 1.0m Avg: Fast 8192 /1550 nm/SM
---	---	--

Analysis Results -- 00007_LO_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.01 0.643	>3.00	-53.34

Overall (End-to-End) Loss: 0.01 dB

```


Primary Trace: 00007_LO_EXT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 10:52 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 10 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 8192
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

```

----- Page 1 -----
| Language: EN |
| Cable ID: |
| Fiber ID: 1 |
| Wavelength: 1550 |
| Org. Loc: |
| Term. Loc: |
| Cable Code: |
| Condition: OT |
| Operator: |
| Comment: |
| Supplier: Anritsu |
| OTDR Model: MT9085B-055 |
| S/N: 6272566725 |
| Optics Mod: |
| S/N: |
| S/W Rev.: 2.03 |
| Other: |
    
```

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:50 PM

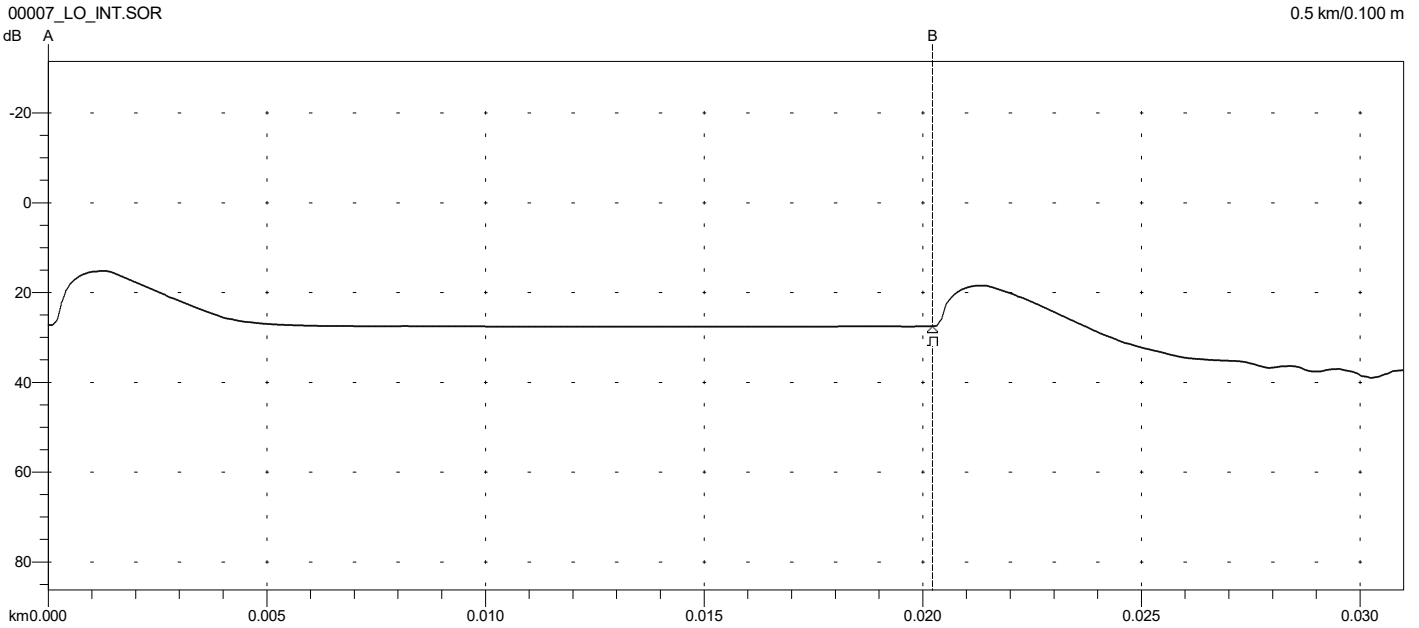

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: 0.248 dB Reflectance: N/A	[H] 10ns / 1.0m Avg: Fast 8192 /1550 nm/SM
---	---	--

Analysis Results -- 00007_LO_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.26 13.018	>3.00	-53.27

Overall (End-to-End) Loss: 0.26 dB

```

Primary Trace: 00007_LO_INT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 10:54 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 10 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 8192
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

```


----- Page 1 -----
| Language: EN |
| Cable ID: |
| Fiber ID: 2 |
| Wavelength: 1550 |
| Org. Loc: |
| Term. Loc: |
| Cable Code: |
| Condition: OT |
| Operator: |
| Comment: |
| Supplier: Anritsu |
| OTDR Model: MT9085B-055 |
| S/N: 6272566725 |
| Optics Mod: |
| S/N: |
| S/W Rev.: 2.03 |
| Other: |
|-----|
    
```

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:54 PM

00029_LO_EXT.SOR

0.5 km/0.100 m

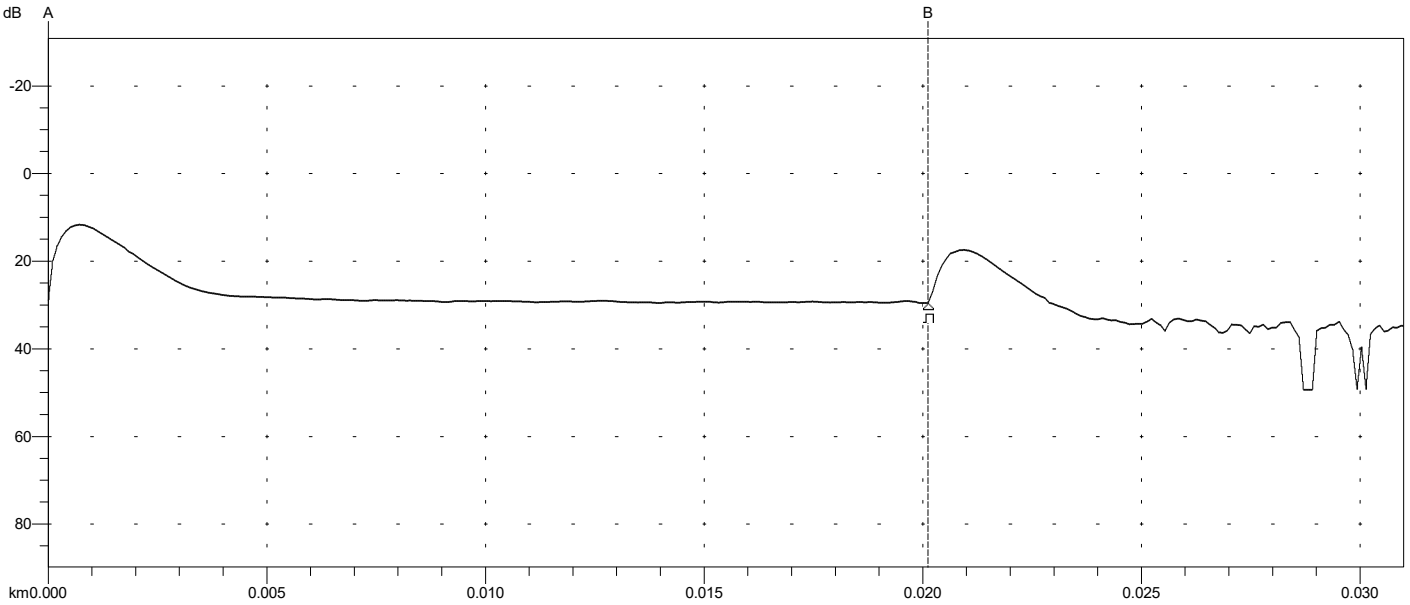

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: 0.719 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	---	--

Analysis Results -- 00029_LO_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.89 44.286	>3.00	>-52.63

Overall (End-to-End) Loss: 0.89 dB

```


Primary Trace: 00029_LO_EXT.SOR
Date: 08/03/23 Range: 0.5 km
Time: 03:52 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

```

----- Page 1 -----
| Language: IT |
| Cable ID: |
| Fiber ID: 1 |
| Wavelength: 1550 |
| Org. Loc: |
| Term. Loc: |
| Cable Code: |
| Condition: OT |
| Operator: |
| Comment: |
| Supplier: Anritsu |
| OTDR Model: MT9085B-055 |
| S/N: 6272458690 |
| Optics Mod: |
| S/N: |
| S/W Rev.: 2.00 |
| Other: |
    
```

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:55 PM

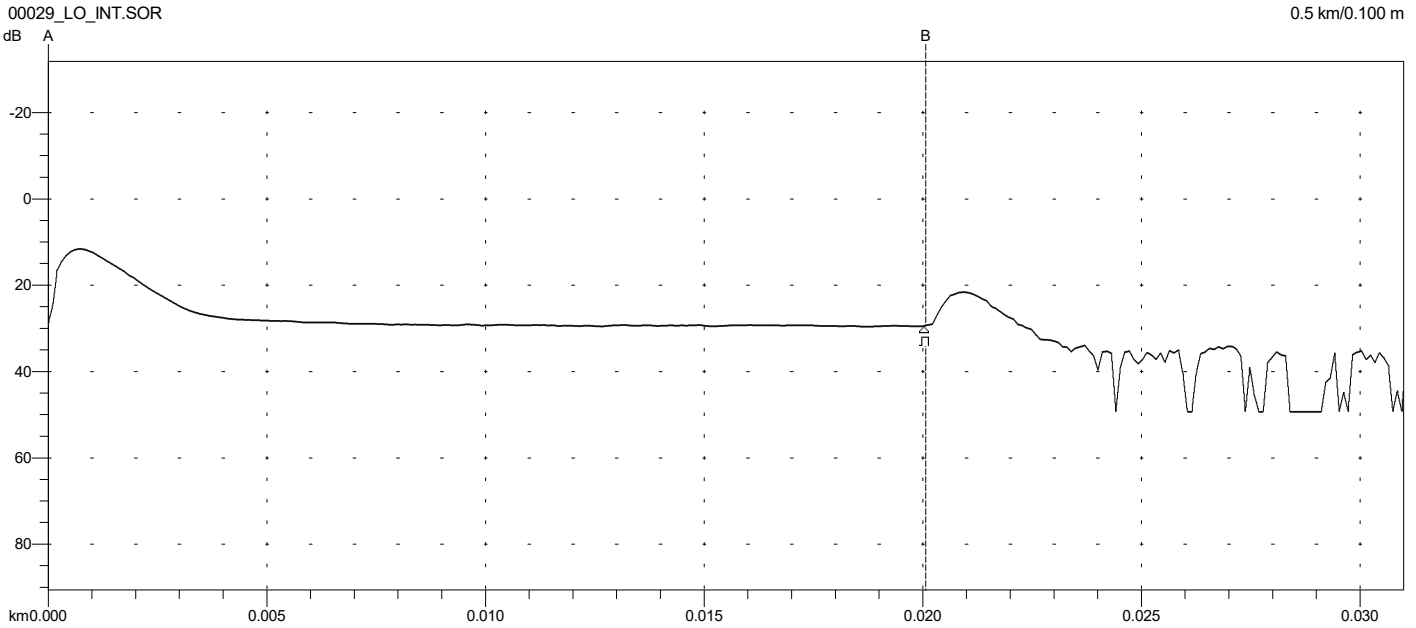

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: 0.609 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	---	--

Analysis Results -- 00029_LO_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0200	0.77 38.553	>3.00	>-61.04

Overall (End-to-End) Loss: 0.77 dB

```

Primary Trace: 00029_LO_INT.SOR
Date: 08/03/23 Range: 0.5 km
Time: 03:55 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other: