


FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:01 PM

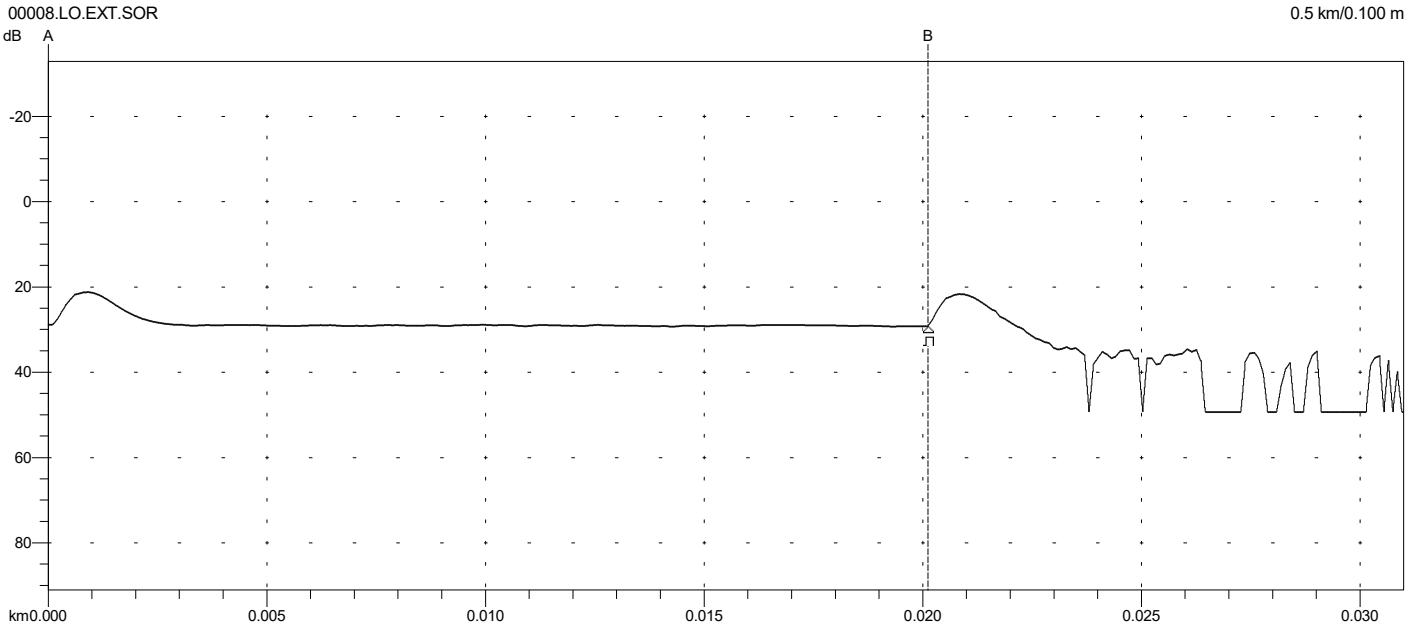

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: 0.374 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	---	--

Analysis Results -- 00008.LO.EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.45 22.176	>3.00	>-61.77

Overall (End-to-End) Loss: 0.45 dB

```


Primary Trace: 00008.LO.EXT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 02:53 PM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Loss: 0.06 dB  Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:02 PM

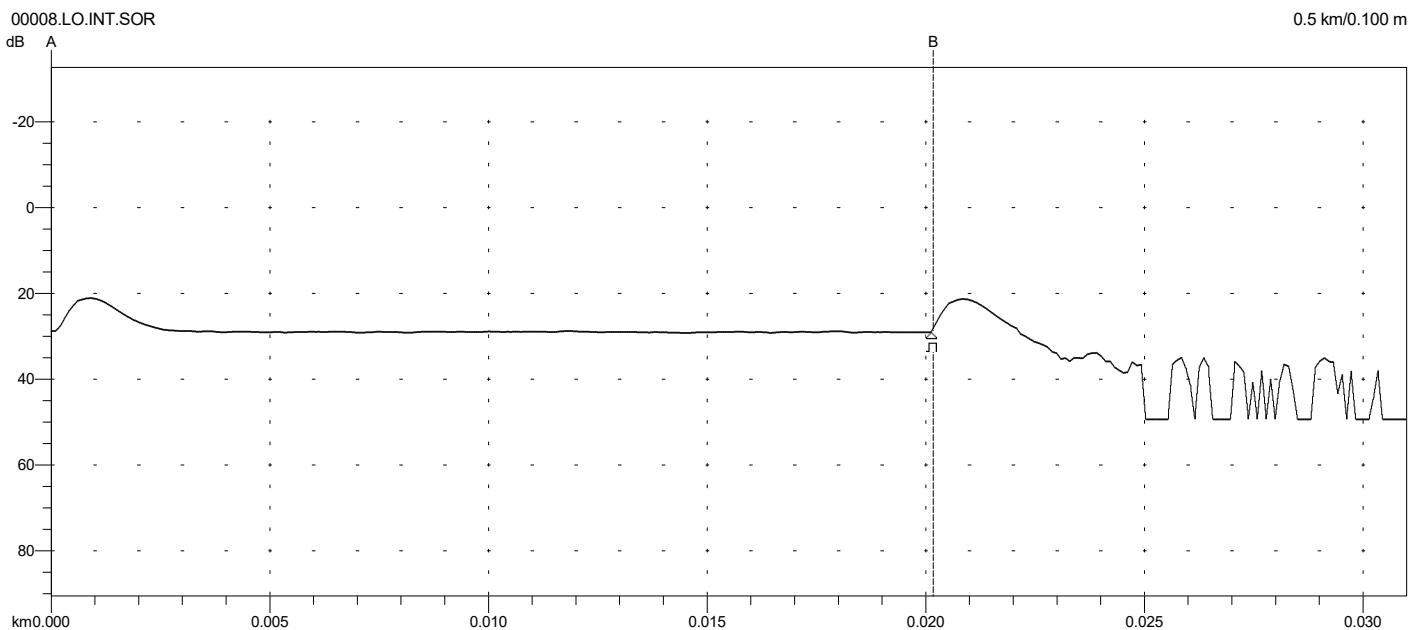

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: -0.579 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	--	--

Analysis Results -- 00008.LO.INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.27 13.663	>3.00	>-61.39

Overall (End-to-End) Loss: 0.27 dB

```


Primary Trace: 00008.LO.INT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 02:51 PM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Horz. Shift: 0.0000 km
Loss: 0.06 dB     Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:06 PM

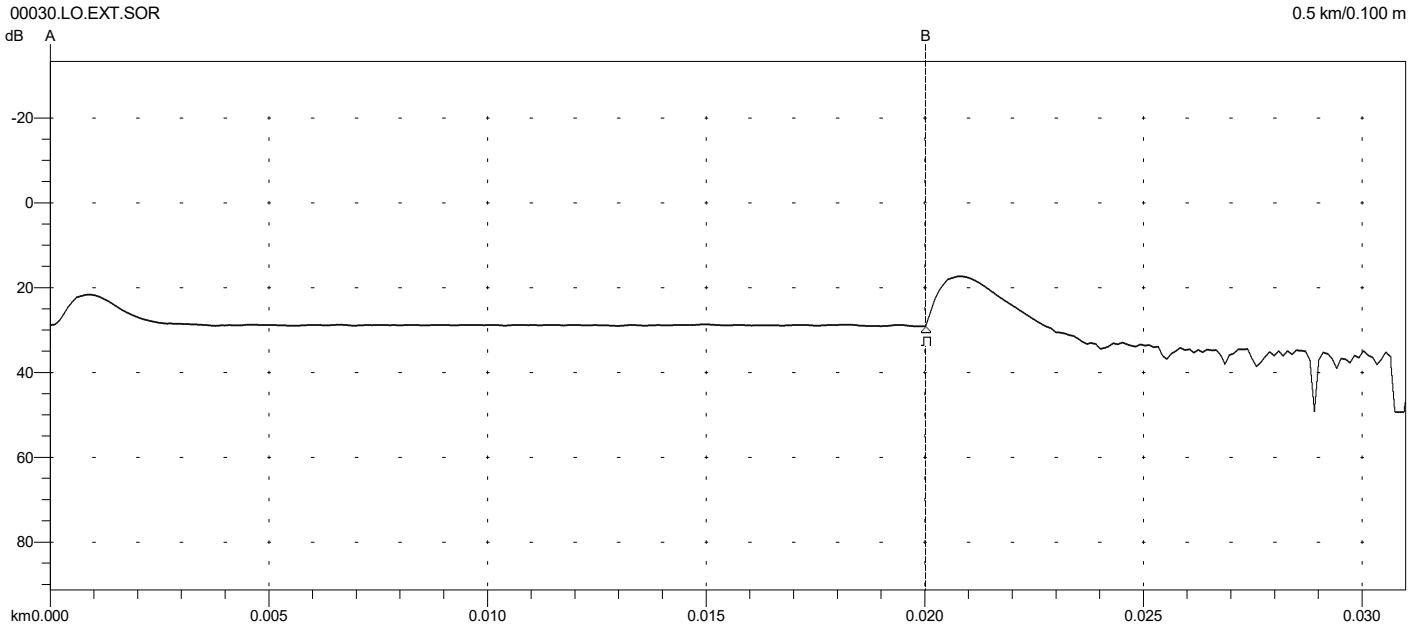

A: 0.0000 km B: 0.0200 km A -> B: 0.0200 km	Index: 1.468200 2-Point Loss: 0.292 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	---	--

Analysis Results -- 00030.LO.EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0200	0.31 15.448	>3.00	>-53.22

Overall (End-to-End) Loss: 0.31 dB

```


Primary Trace: 00030.LO.EXT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 10:49 AM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Loss: 0.06 dB  Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

```

----- Page 1 -----
| Language: IT          |
| Cable ID:            |
| Fiber ID: 1          |
| Wavelength: 1550    |
| Org. Loc:           |
| Term. Loc:          |
| Cable Code:         |
| Condition: OT       |
| Operator:           |
| Comment:            |
| Supplier: Anritsu   |
| OTDR Model: MT9085B-055
|   S/N: 6272458690
| Optics Mod:         |
|   S/N:              |
| S/W Rev.: 2.00     |
| Other:              |
|-----|
    
```

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:06 PM

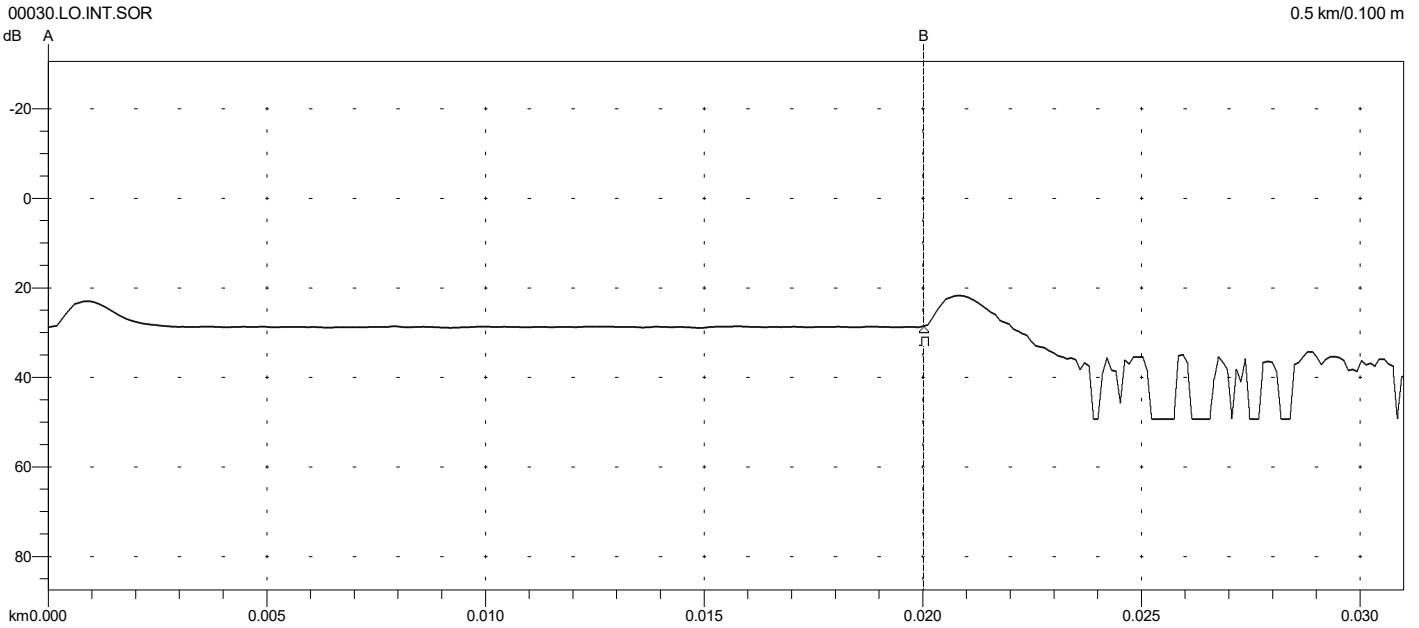

A: 0.0000 km B: 0.0200 km A -> B: 0.0200 km	Index: 1.468200 2-Point Loss: -0.242 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	--	--

Analysis Results -- 00030.LO.INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0200	0.04 2.231	>3.00	>-62.88

Overall (End-to-End) Loss: 0.04 dB

```

Primary Trace: 00030.LO.INT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 10:51 AM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Horz. Shift: 0.0000 km
Loss: 0.06 dB     Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other: