


FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:02 PM

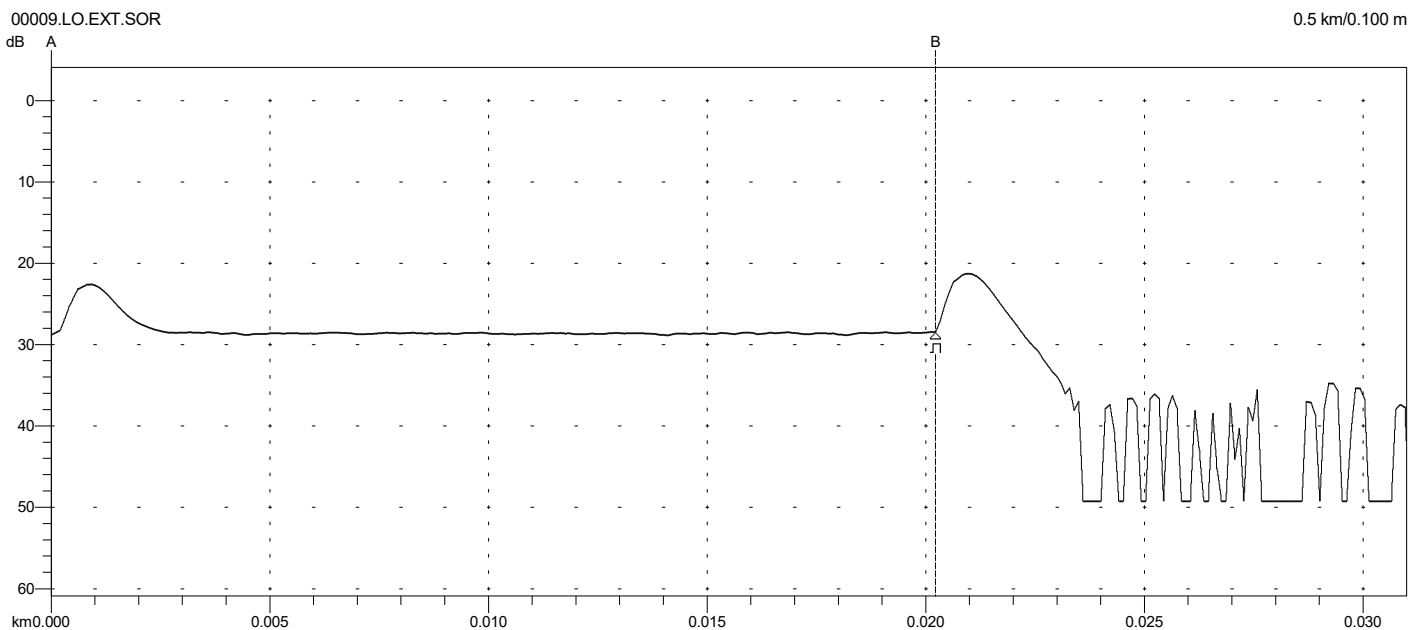

| | | |
|---|--|--|
| A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km | Index: 1.468200 2-Point Loss: -0.366 dB Reflectance: N/A | [H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM |
|---|--|--|

Analysis Results -- 00009.LO.EXT.SOR

| Feature #/Type | Location (km) | Event-Event (dB) (dB/Km) | Loss (dB) | Refl (dB) |
|----------------|---------------|--------------------------|-----------|-----------|
| 1/E | 0.0202 | -0.13 -6.229 | >3.00 | >-62.44 |

Overall (End-to-End) Loss: -0.13 dB

```


Primary Trace: 00009.LO.EXT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 11:19 AM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

```

----- Page 1 -----
| Language: IT          |
| Cable ID:            |
| Fiber ID: 1         |
| Wavelength: 1550    |
| Org. Loc:           |
| Term. Loc:          |
| Cable Code:         |
| Condition: OT       |
| Operator:           |
| Comment:            |
| Supplier: Anritsu   |
| OTDR Model: MT9085B-055
| S/N: 6272458690    |
| Optics Mod:         |
| S/N:                |
| S/W Rev.: 2.00     |
| Other:              |
|-----|
    
```

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:02 PM

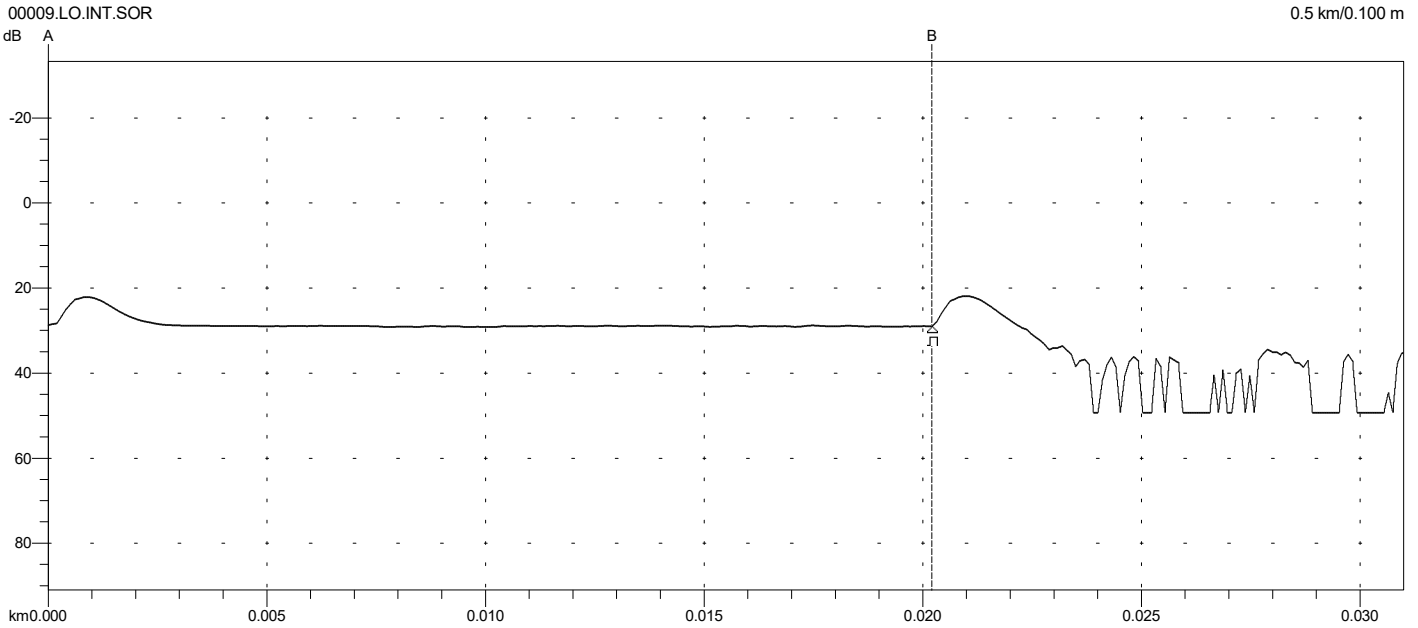

| | | |
|---|---|--|
| A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km | Index: 1.468200 2-Point Loss: 0.218 dB Reflectance: N/A | [H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM |
|---|---|--|

Analysis Results -- 00009.LO.INT.SOR

| Feature #/Type | Location (km) | Event-Event (dB) (dB/Km) | Loss (dB) | Refl (dB) |
|----------------|---------------|--------------------------|-----------|-----------|
| 1/E | 0.0202 | 0.24 11.897 | >3.00 | >-62.73 |

Overall (End-to-End) Loss: 0.24 dB

```


Primary Trace: 00009.LO.INT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 11:21 AM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Horz. Shift: 0.0000 km
Loss: 0.06 dB     Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

| |
|-------------------------|
| Language: IT |
| Cable ID: |
| Fiber ID: 1 |
| Wavelength: 1550 |
| Org. Loc: |
| Term. Loc: |
| Cable Code: |
| Condition: OT |
| Operator: |
| Comment: |
| Supplier: Anritsu |
| OTDR Model: MT9085B-055 |
| S/N: 6272458690 |
| Optics Mod: |
| S/N: |
| S/W Rev.: 2.00 |
| Other: |

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:07 PM

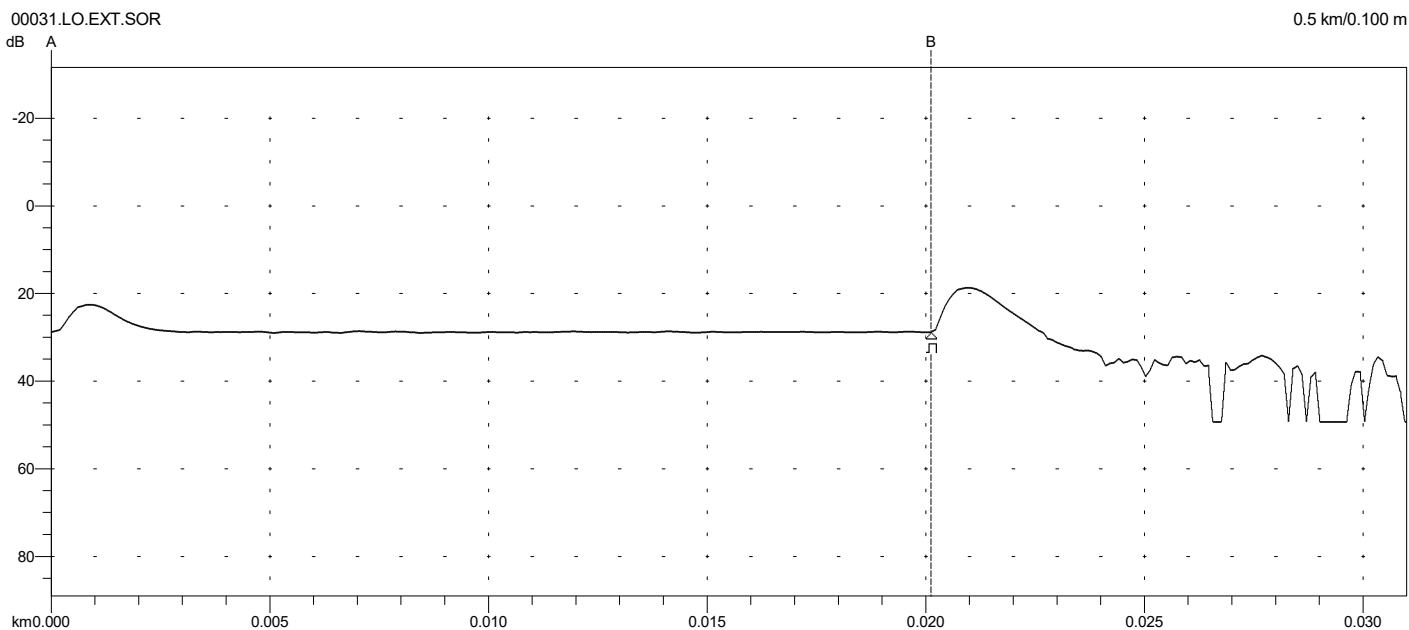

| | | |
|---|---|--|
| A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km | Index: 1.468200 2-Point Loss: 0.016 dB Reflectance: N/A | [H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM |
|---|---|--|

Analysis Results -- 00031.LO.EXT.SOR

| Feature #/Type | Location (km) | Event-Event (dB) (dB/Km) | Loss (dB) | Refl (dB) |
|----------------|---------------|--------------------------|-----------|-----------|
| 1/E | 0.0201 | 0.10 5.002 | >3.00 | >-56.50 |

Overall (End-to-End) Loss: 0.10 dB

```


Primary Trace: 00031.LO.EXT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 10:55 AM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Horz. Shift: 0.0000 km
Loss: 0.06 dB     Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

| |
|-------------------------|
| Language: IT |
| Cable ID: |
| Fiber ID: 1 |
| Wavelength: 1550 |
| Org. Loc: |
| Term. Loc: |
| Cable Code: |
| Condition: OT |
| Operator: |
| Comment: |
| Supplier: Anritsu |
| OTDR Model: MT9085B-055 |
| S/N: 6272458690 |
| Optics Mod: |
| S/N: |
| S/W Rev.: 2.00 |
| Other: |

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:07 PM

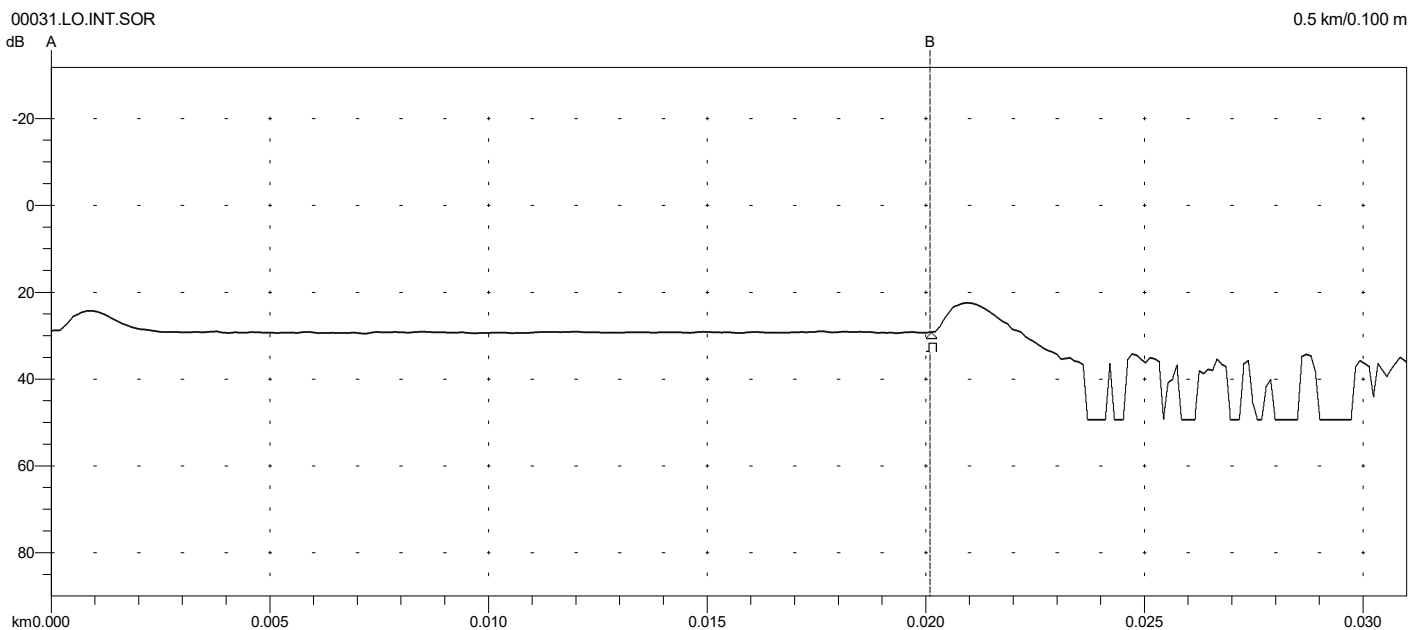

| | | |
|---|---|--|
| A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km | Index: 1.468200 2-Point Loss: 0.353 dB Reflectance: N/A | [H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM |
|---|---|--|

Analysis Results -- 00031.LO.INT.SOR

| Feature #/Type | Location (km) | Event-Event (dB) (dB/Km) | Loss (dB) | Refl (dB) |
|----------------|---------------|--------------------------|-----------|-----------|
| 1/E | 0.0201 | 0.36 17.986 | >3.00 | >-63.24 |

Overall (End-to-End) Loss: 0.36 dB

```

Primary Trace: 00031.LO.INT.SOR
Date: 07/28/23      Range: 0.5 km
Time: 11:00 AM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Horz. Shift: 0.0000 km
Loss: 0.06 dB     Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

| |
|-------------------------|
| Language: IT |
| Cable ID: |
| Fiber ID: 1 |
| Wavelength: 1550 |
| Org. Loc: |
| Term. Loc: |
| Cable Code: |
| Condition: OT |
| Operator: |
| Comment: |
| Supplier: Anritsu |
| OTDR Model: MT9085B-055 |
| S/N: 6272458690 |
| Optics Mod: |
| S/N: |
| S/W Rev.: 2.00 |
| Other: |