


FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:51 PM

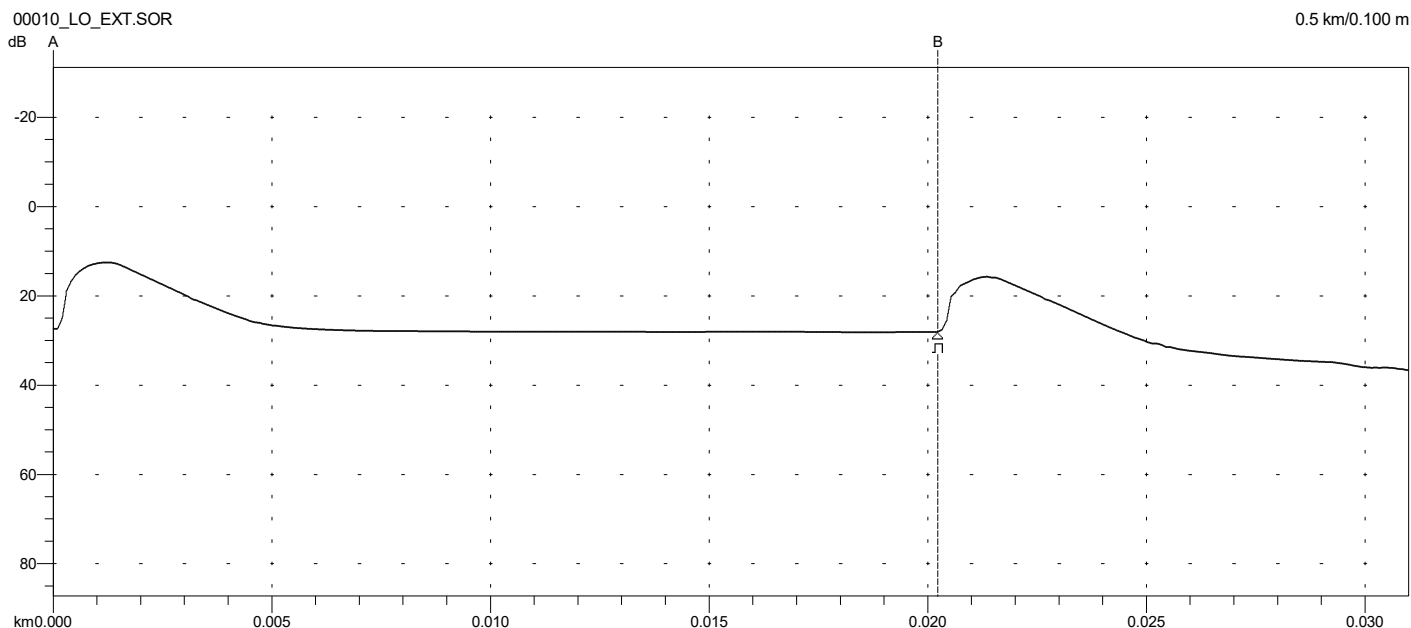

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: 0.749 dB Reflectance: N/A	[H] 10ns / 1.0m Avg: Fast 8192 /1550 nm/SM
---	---	--

Analysis Results -- 00010_LO_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.73 36.268	>3.00	-46.98

Overall (End-to-End) Loss: 0.73 dB

```


Primary Trace: 00010_LO_EXT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 11:05 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 10 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 8192
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: EN
Cable ID:
Fiber ID: 9
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:51 PM

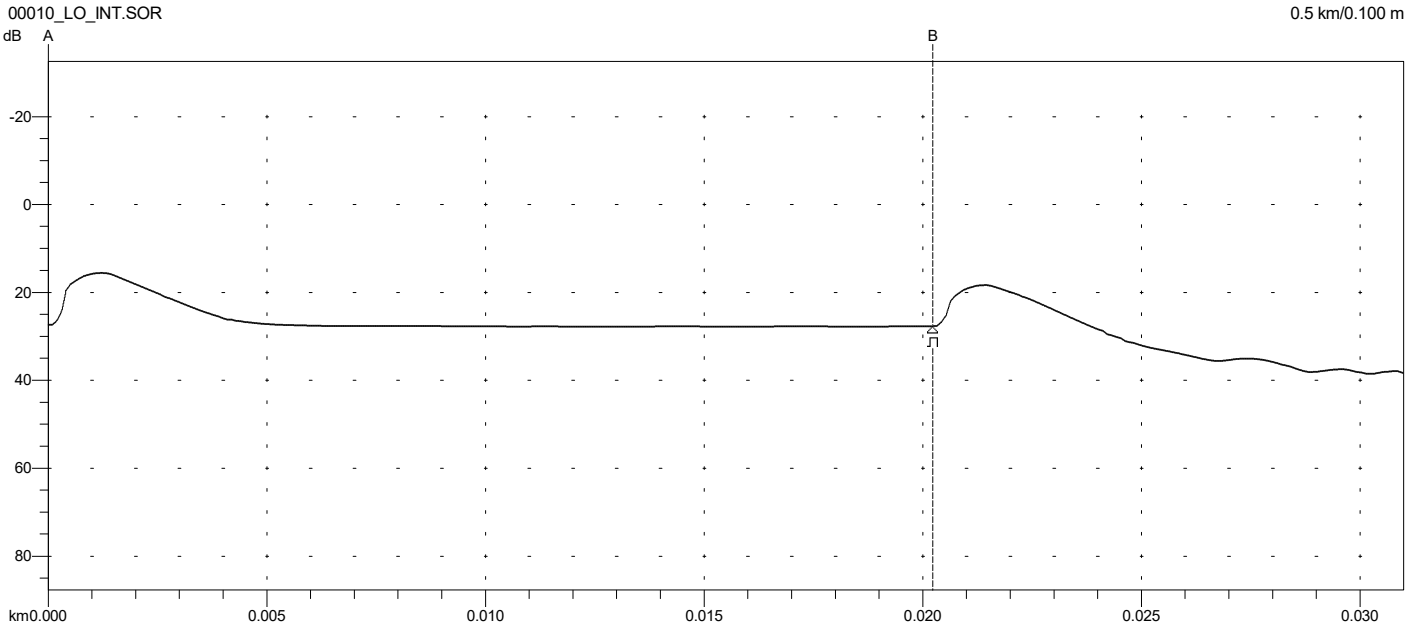

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: 0.315 dB Reflectance: N/A	[H] 10ns / 1.0m Avg: Fast 8192 /1550 nm/SM
---	---	--

Analysis Results -- 00010_LO_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.33 16.264	>3.00	-52.83

Overall (End-to-End) Loss: 0.33 dB

```

Primary Trace: 00010_LO_INT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 11:07 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 10 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 8192
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----


Language: EN
Cable ID:
Fiber ID: 10
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:56 PM

00032_LO_EXT.SOR

0.5 km/0.100 m

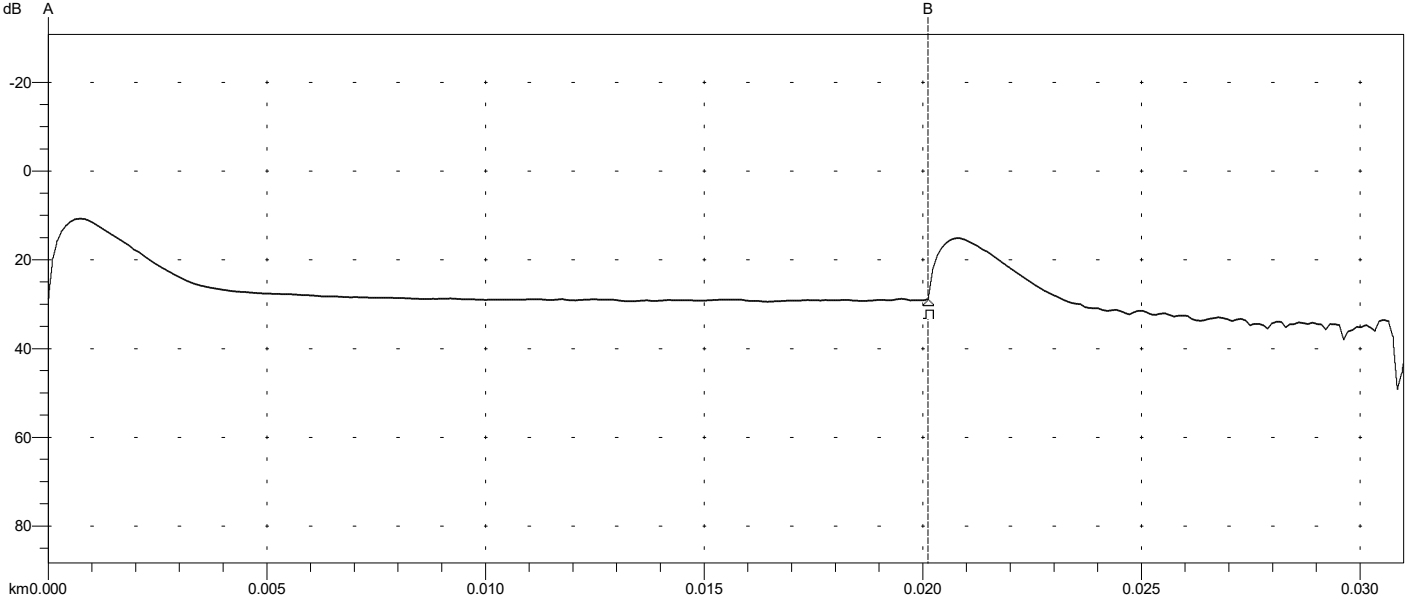

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: 0.077 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	---	--

Analysis Results -- 00032_LO_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.43 21.547	>3.00	>-48.83

Overall (End-to-End) Loss: 0.43 dB

```


Primary Trace: 00032_LO_EXT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 02:39 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:56 PM

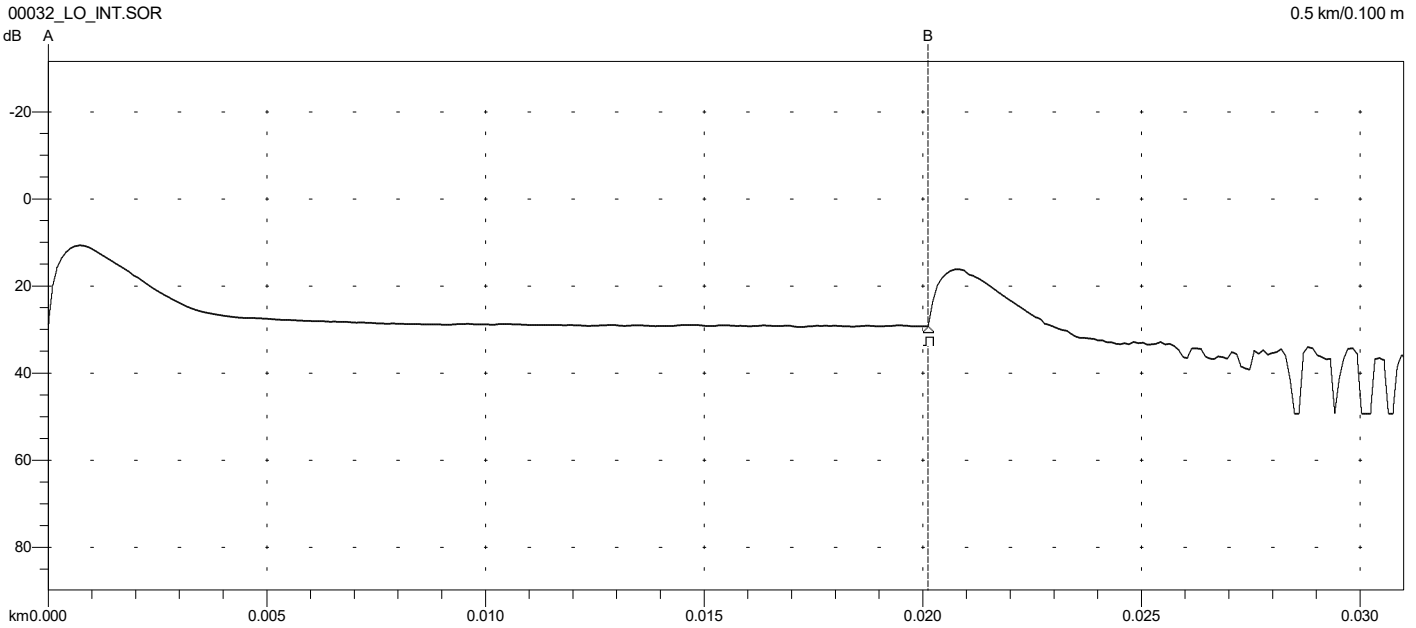

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: 0.512 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	---	--

Analysis Results -- 00032_LO_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.56 27.724	>3.00	>-50.60

Overall (End-to-End) Loss: 0.56 dB

```

Primary Trace: 00032_LO_INT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 02:41 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other: