


FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/10/2023 Time: 08:32 AM

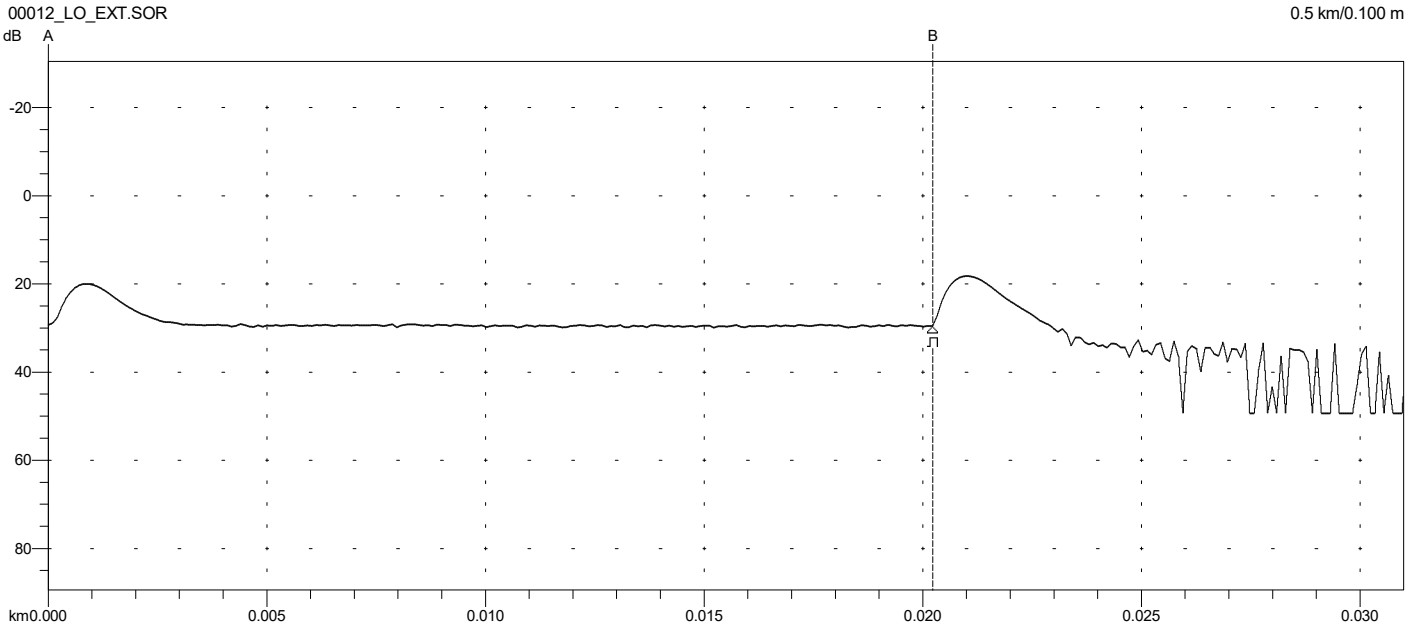

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: 0.249 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 12288 /1550 nm/SM
---	---	--

Analysis Results -- 00012_LO_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.50 24.668	>3.00	>-53.81

Overall (End-to-End) Loss: 0.50 dB

```

Primary Trace: 00012_LO_EXT.SOR
Date: 08/09/23 Range: 0.5 km
Time: 11:11 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 12288
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----


Language: IT
Cable ID:
Fiber ID: 80
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/10/2023 Time: 08:33 AM

00012_LO_INT.SOR

0.5 km/0.100 m

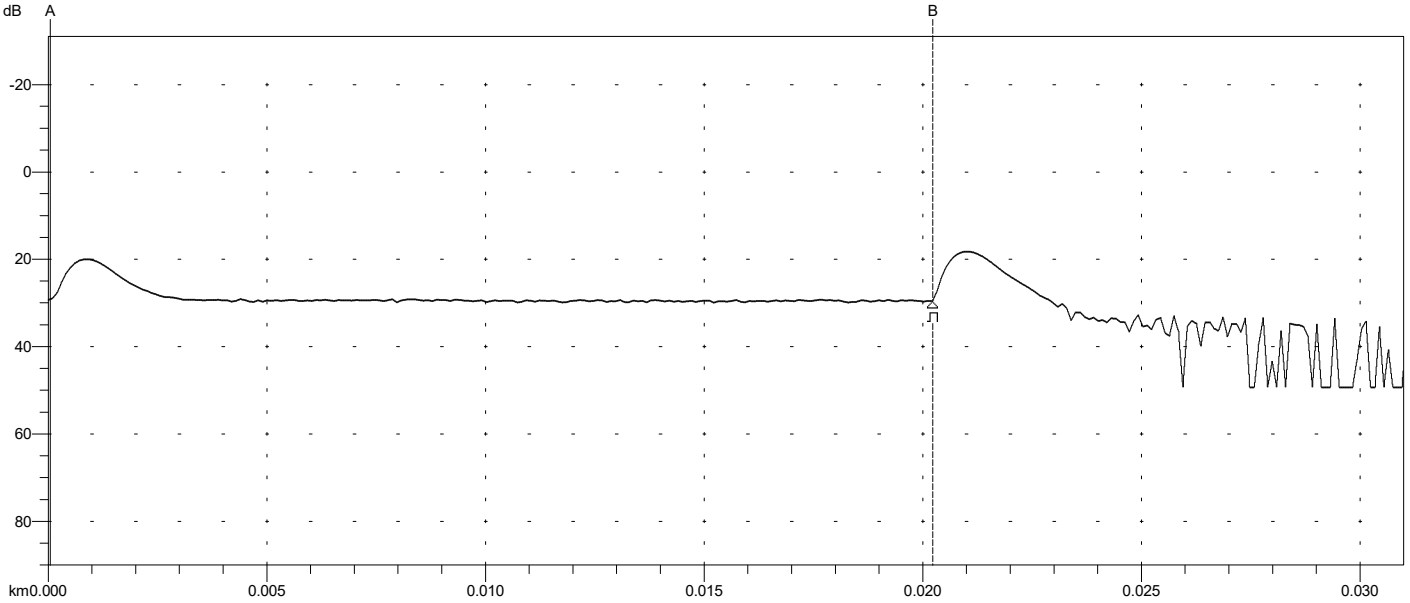

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: 0.439 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 12288 /1550 nm/SM
---	---	--

Analysis Results -- 00012_LO_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.50 24.668	>3.00	>-53.81

Overall (End-to-End) Loss: 0.50 dB

```


Primary Trace: 00012_LO_INT.SOR
Date: 08/09/23 Range: 0.5 km
Time: 11:11 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 12288
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 80
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/10/2023 Time: 08:35 AM

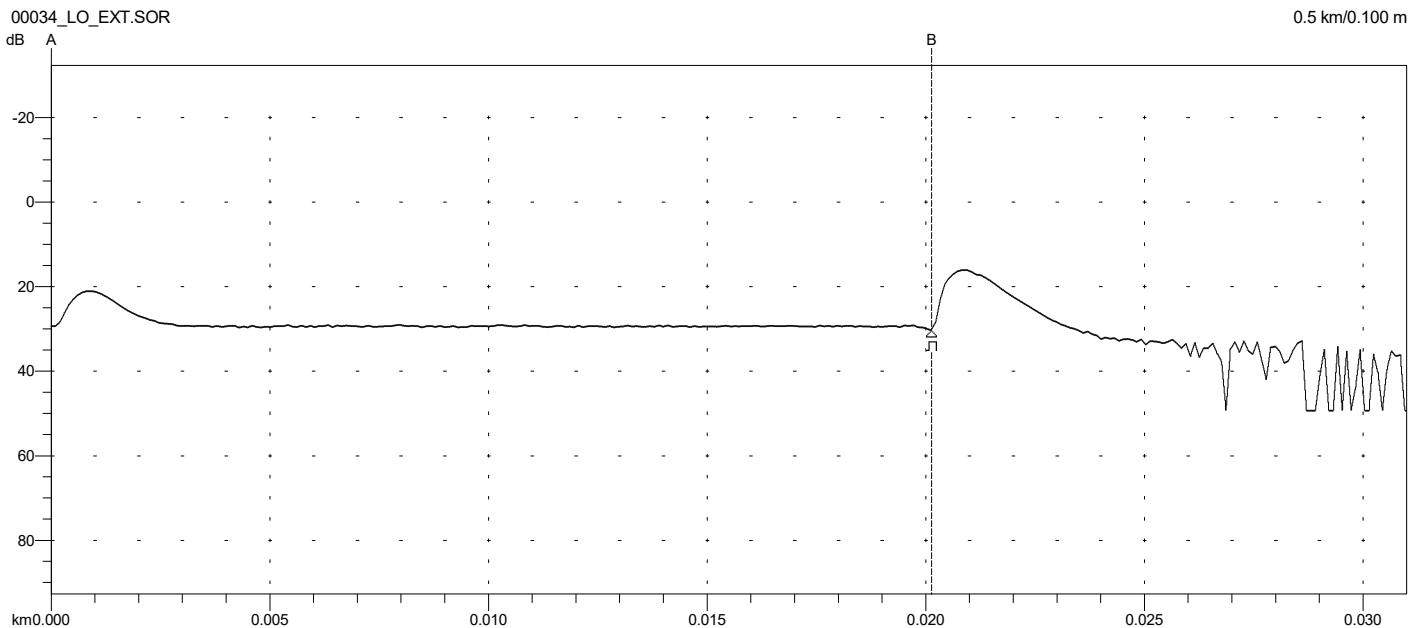

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: 0.854 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 12288 /1550 nm/SM
---	---	--

Analysis Results -- 00034_LO_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.29 14.508	>3.00	>-50.04

Overall (End-to-End) Loss: 0.29 dB

```


Primary Trace: 00034_LO_EXT.SOR
Date: 08/09/23      Range: 0.5 km
Time: 09:54 PM     Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module:      Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds:  Loss: 0.05 dB  Horz. Shift: 0.0000 km
                   Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 12288
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 80
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/10/2023 Time: 08:35 AM

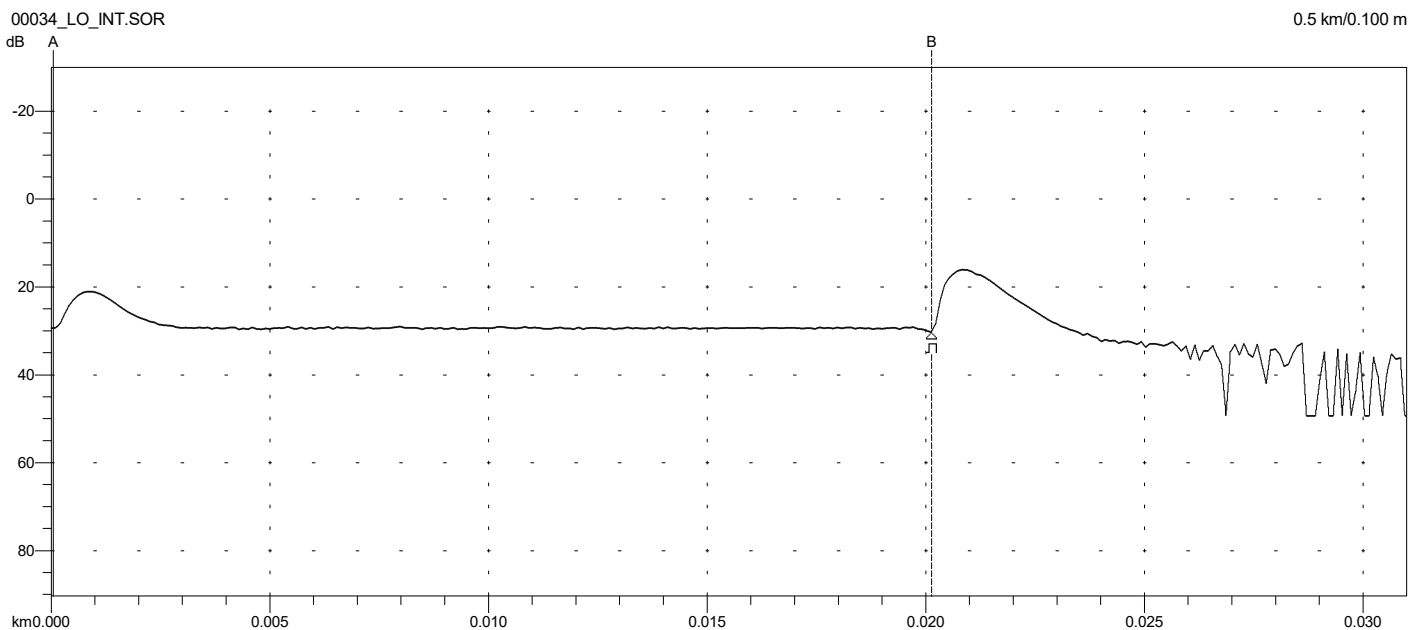

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: 0.886 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 12288 /1550 nm/SM
---	---	--

Analysis Results -- 00034_LO_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.29 14.508	>3.00	>-50.04

Overall (End-to-End) Loss: 0.29 dB

```

Primary Trace: 00034_LO_INT.SOR
Date: 08/09/23 Range: 0.5 km
Time: 09:54 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 12288
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 80
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other: