


FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/11/2023 Time: 06:10 PM

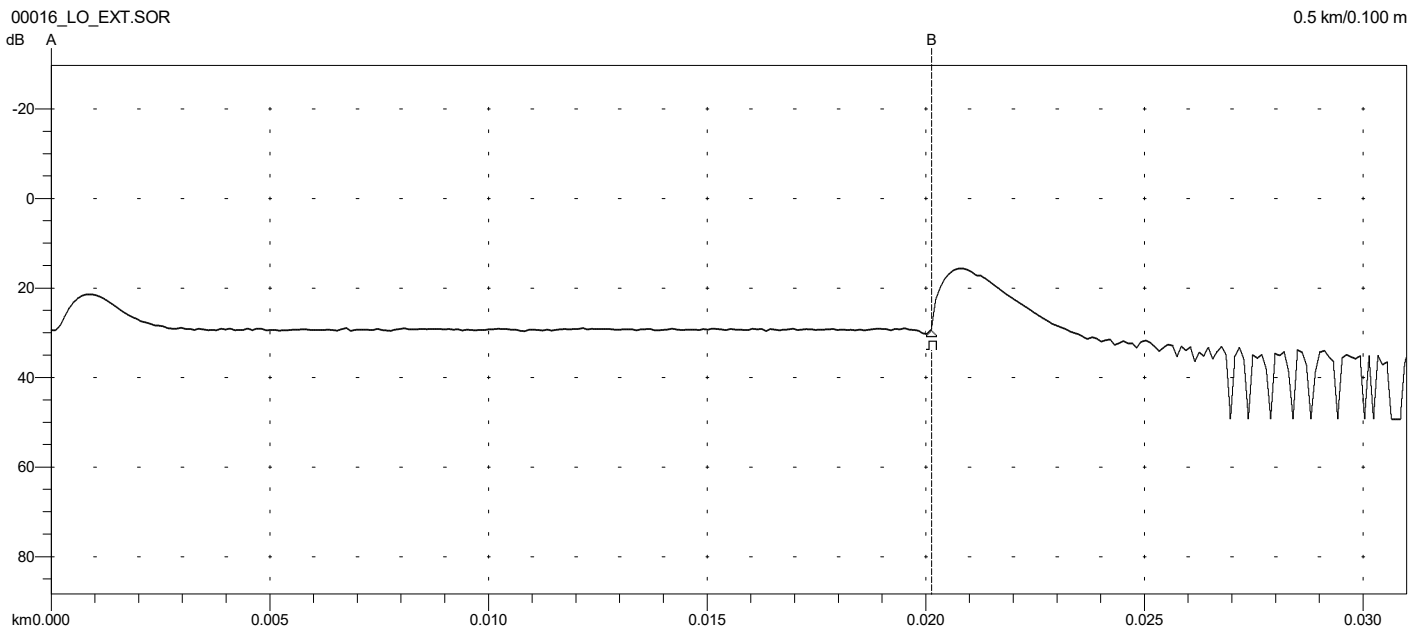

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: -0.280 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 12288 /1550 nm/SM
---	--	--

Analysis Results -- 00016_LO_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.28 14.028	>3.00	>-49.43

Overall (End-to-End) Loss: 0.28 dB

```


Primary Trace: 00016_LO_EXT.SOR
Date: 08/11/23 Range: 0.5 km
Time: 05:49 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 12288
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 80
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/11/2023 Time: 06:10 PM

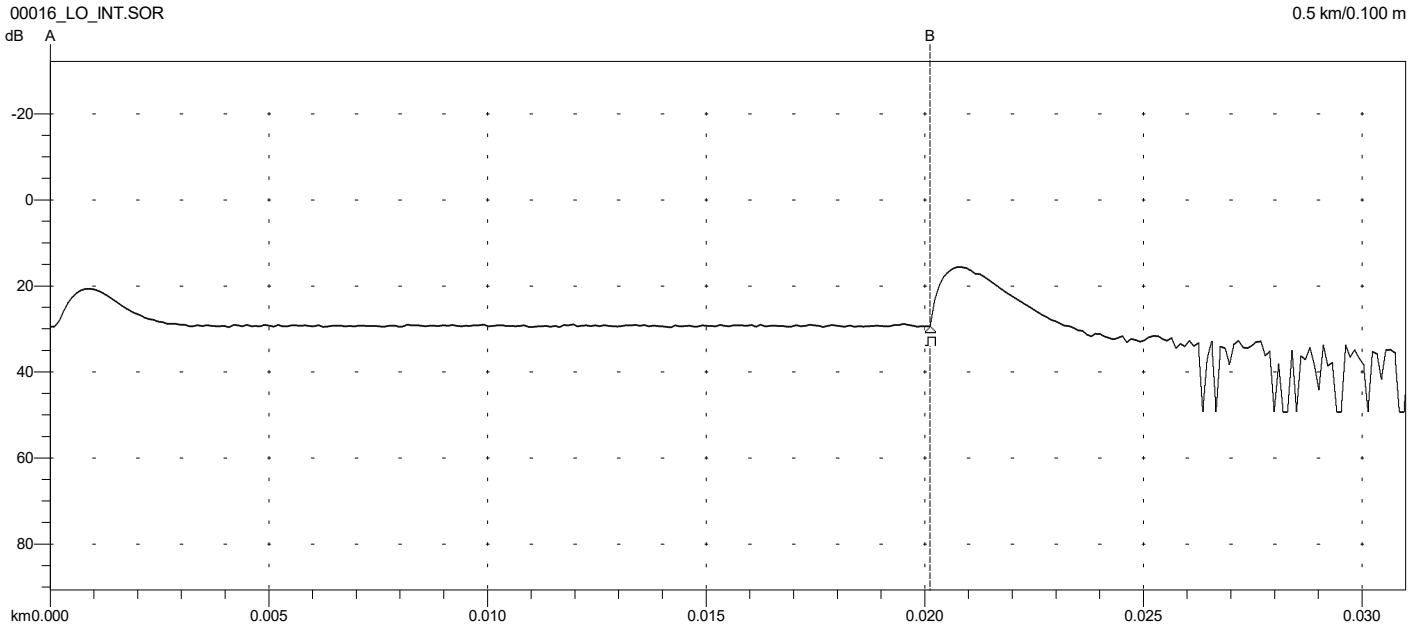

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: -0.113 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 12288 /1550 nm/SM
---	--	--

Analysis Results -- 00016_LO_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.07 3.279	>3.00	>-49.35

Overall (End-to-End) Loss: 0.07 dB

```


Primary Trace: 00016_LO_INT.SOR
Date: 08/11/23 Range: 0.5 km
Time: 05:53 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 12288
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 80
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/11/2023 Time: 06:13 PM

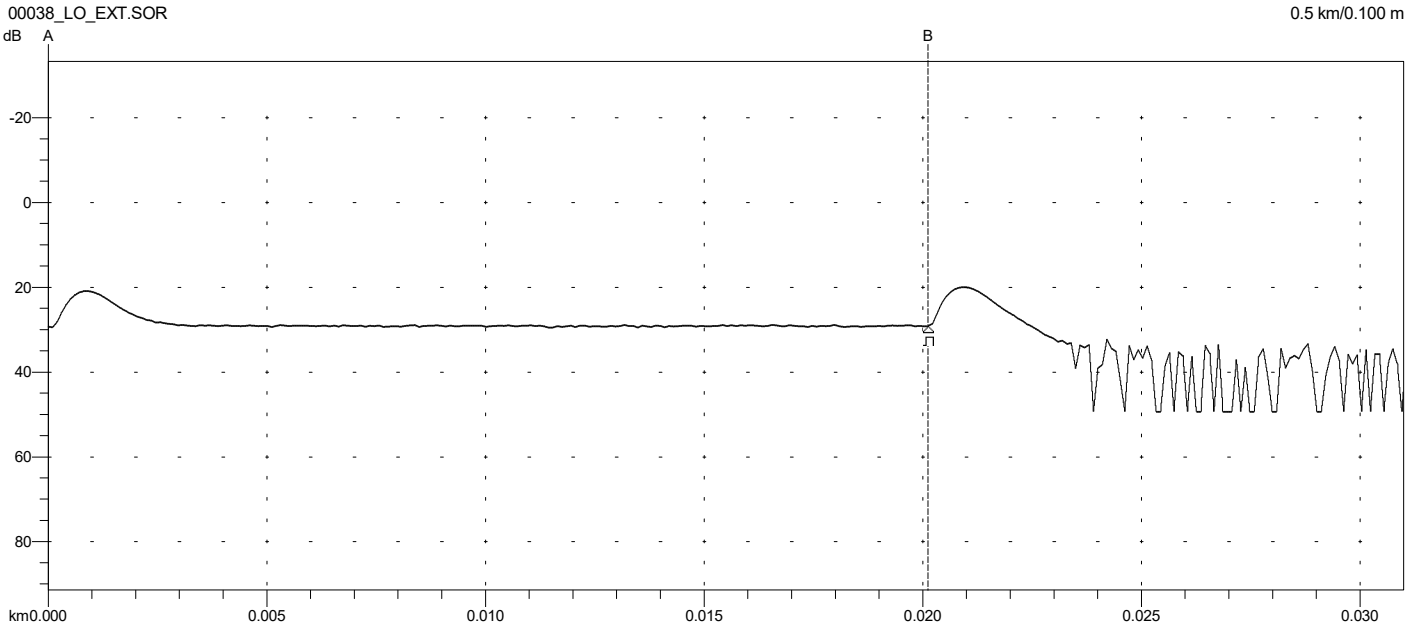

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: -0.122 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 12288 /1550 nm/SM
---	--	--

Analysis Results -- 00038_LO_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	-0.17 -8.347	>3.00	>-57.96

Overall (End-to-End) Loss: -0.17 dB

```


Primary Trace: 00038_LO_EXT.SOR
Date: 08/11/23 Range: 0.5 km
Time: 06:49 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 12288
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 80
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/11/2023 Time: 06:13 PM

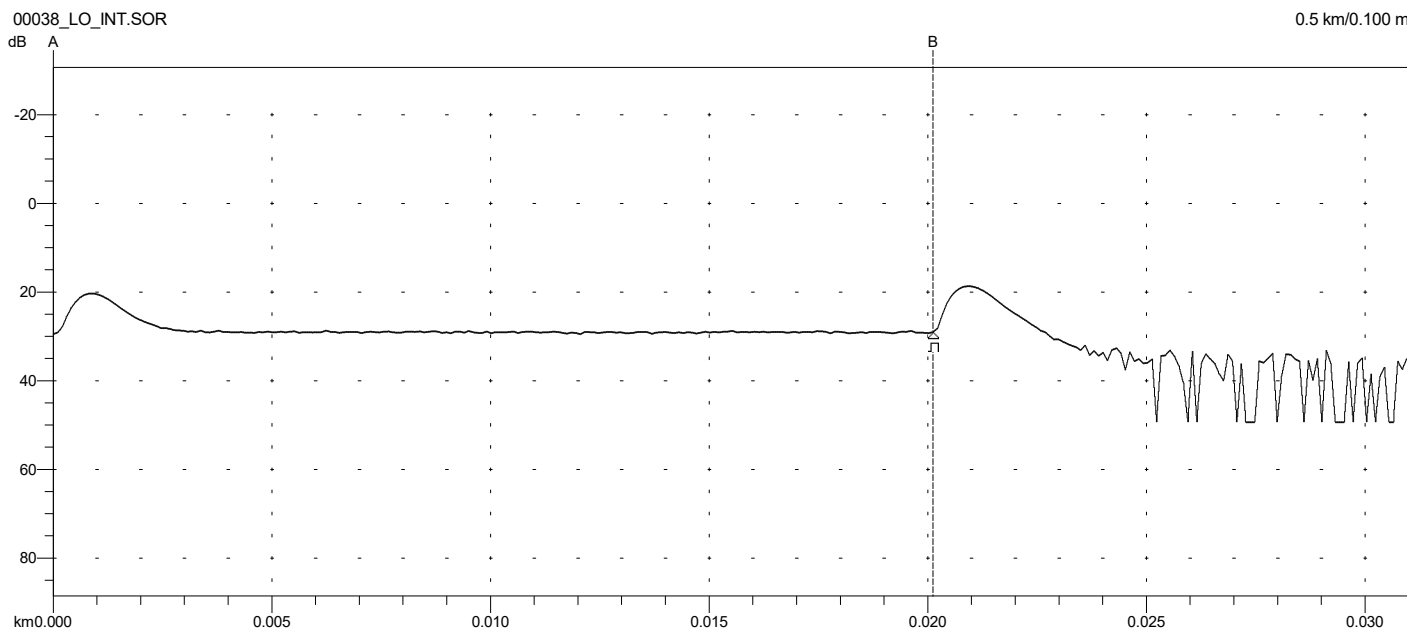

A: 0.0000 km B: 0.0201 km A -> B: 0.0201 km	Index: 1.468200 2-Point Loss: -0.428 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 12288 /1550 nm/SM
---	--	--

Analysis Results -- 00038_LO_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	-0.07 -3.677	>3.00	>-55.48

Overall (End-to-End) Loss: -0.07 dB

```

Primary Trace: 00038_LO_INT.SOR
Date: 08/11/23 Range: 0.5 km
Time: 06:50 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 12288
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 80
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other: