

view⁵X

CORE ALIGNMENT
FUSION SPLICER



Built-in GPS & Wireless Connectivity
Remote Tracking, Management & Support
Compatible with View Pro Manager



view5x

The View 5X is engineered for the demands of modern fiber optic environments - where precision, speed, and reliability matter most. As a powerful core alignment fusion splicer, it delivers professional-grade performance tailored to the fast-paced nature of today's fiber installation and maintenance work.

Whether you're working on large-scale deployments or performing detailed splicing in the field, the View 5X consistently provides accurate, dependable results. Designed to balance speed with control, it supports both high-volume workflows and precise, sensitive connections.

Built to withstand challenging jobsite conditions, the View 5X combines robust durability with a clear, user-friendly interface that keeps your work efficient and intuitive. With rapid boot-up, fast splicing and heating times, and stable core alignment, it's a reliable tool that keeps your projects moving-without unnecessary complexity.



view5x

CORE ALIGNMENT
FUSION SPLICER



Ultrafast Splicing
& Heating



Large Battery
Capacity



Bright Operation
Lightning



Versatile Fiber
Holder



Quick & Intuitive
Interface



Splicing Time: **4s**



Heating Time: **9s**



Battery Capacity:
7000mAh
up to **350 cycles**

Electrodes

Optimized for performance & splice quality
Up to 5500 arcs

Fiber holders

Reliable and compatible with common
fiber/cable types

Durable Metal
Windproof Cover

Heater

Fast and even heat distribution

Control Buttons

Hand strap

For a secure fit


Touch Screen

Engineered for smooth navigation

USB Type C

Battery

The largest on the market
Use & Charge at the same time

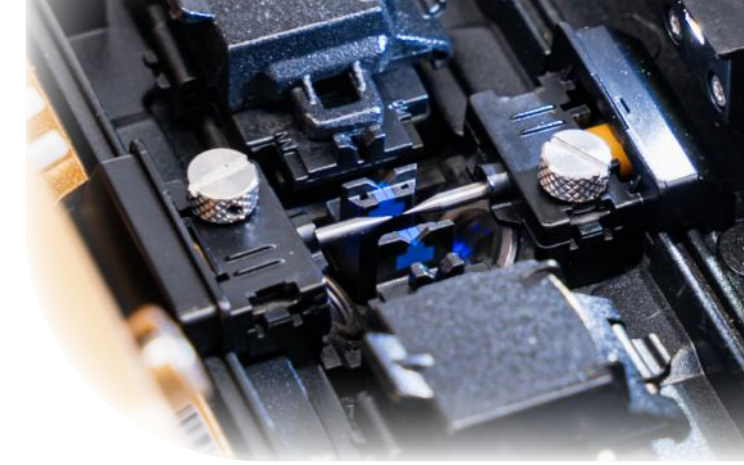

DIMENSIONS

131mm



145mm

160mm



145mm

Height: 145mm
Width: 160mm
Depth: 131mm



TECHNICAL SPECIFICATIONS

Items	Specifications
Model	View 5X
Splicing Method	Core Alignment
Number of fiber	Single
Applicable Fibers	SM(TU-T G.652&T G.657) / MM(ITU-T G.651) / DS(ITU-T G.653) / NZDS (ITU-T G.655)
Coating Diameter	100µm-3mm
Cladding Diameter	80-150µm
Cleaved Length	5-16mm
Average Loss	SM: 0.01 dB / MM: 0.01dB / DS: 0.03dB / NZDS: 0.03dB / G.657: 0.01dB
Return Loss	> > 60dB
Splicing Time	Quick mode : Avg. 4 sec
	SM mode: Avg. 5 sec
	Auto mode : Avg 7 sec
Splice Programs	Max 300 modes
Electrode Life span	6000 arcs discharges
Heating Programs	Max 100 modes
Heating Time	Quick: 9s
	Average: 13s (60mm slim)
Protection Sleeve	20mm-60mm
Data Output	Type C, View Pro Manager (IoT & GPS)
Splice Memory	20,000 Splice data / 20,000 Splice image
Battery	Battery Capacity : 7000mAh
	Operation Cycle : up to 350 cycles (Splicing + Heating)
Power Supply	AC Input 100 ~ 240V, DC DC input with USB-C port
Monitor	5.0" Color LCD display, Full touch screen
Magnification	x360, x520
Size & Weight	160Wx131Dx145H with rubber bumper / 2.0kg (including battery)
Pull Test	1.96-2.25N

PACKAGE & ACCESSORIES

Product	Type
Cleaver	V12
SOC Holder	FH-SOC-R
SOC Heater Cover	HTS-SOC-06
AC Adaptor	JS-180300
Cooling Tray	CG-25
Electrodes	E-70
Battery Pack	LBT-7000
Power Cable	ACC-25
USB Cable	USB-9P
Carrying Case	ICC-55
Shoulder Strap	ST-01
Optional Accessories	Type
Alcohol pump	TK02-AP01
Stripper	TK02-MP01
Cigarette Lighter Cable	CJ-11
Heating sleeve (60mm)	PS-60S
Magnetic Detachable Holder	FH-200/250S, FH-900S

ENVIRONMENTAL CONDITION & TEST

Items	Specifications
Operating Conditions	Altitude: 0 - 5000m Humidity: 0 - 95%, non-dew Temperature: -10 to 50°C Wind: up to 15m/sec
Storage Conditions	Humidity: 0 - 95%, non-dew Temperature: -40 to 80°C
Resistance Tests	Shock Resistance : 76cm for bottom surface drop Exposure to Dust : 0.1 to 500µm diameter aluminium silicate Rain Resistance : 10 mm/h for 10 mins

- Water resistance (IPx2)
- Shock resistance (Drop from 76cm)
- Dust resistance (IP5X)



Water Resistance



Shock Resistance




Dust Resistance

i INNO Instrument does not accept responsibility for damages arising from misuse of the product.

CORE ALIGNMENT FUSION SPLICER APPLICATIONS

INNO instrument core alignment fusion splicers provide unmatched flexibility across the entire fiber infrastructure, from the central office core networks to the final subscriber termination. Whether installing, expanding or repairing, our core alignment fusion splicers ensure that every splice is fast, accurate and field-ready.

FTTH Environment

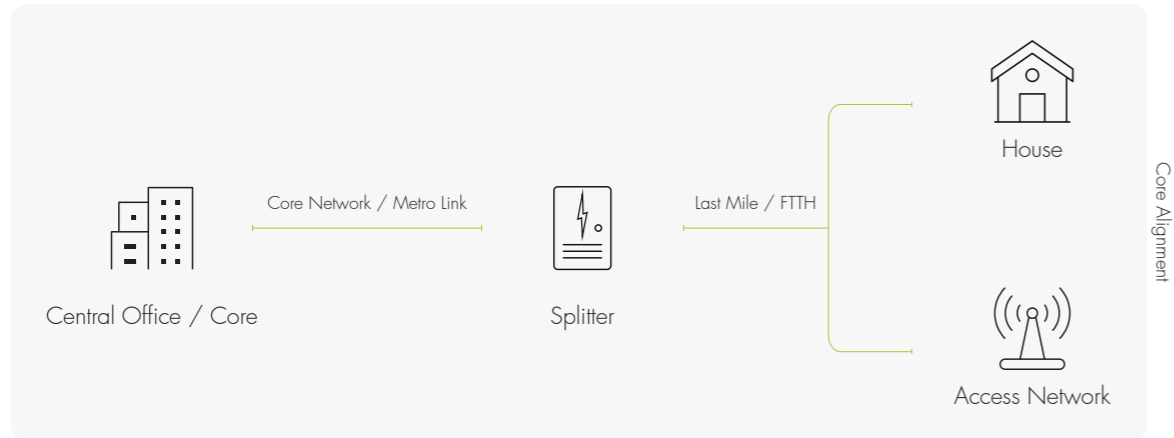


Core Network / Metro Links	Delivers low-loss, high-precision splicing for backbone and metro networks. Supports consistent uptime and performance in high-bandwidth, high-density routes.
Feeder Cable / Pre-Splitter Access	Ensures stable splicing across high-fiber-count cables. Ideal for secure, long-term connectivity in closures and distribution points.
Splitter Node / Distribution Cabinet	Enables accurate core alignment for passive splitter applications. Maintains reliable splicing during transitions between feeder and distribution fibers.
Last Mile / FTTH Drops	Provides fast, high-quality splicing for final customer connections. Perfect for quick terminations from street cabinets to premises - including direct-to-home installs.
Field Repairs / Fault Restoration	Built for speed and dependability in emergency splicing scenarios.



Key Field Applications

Last-Mile Termination	Supports splice-on connectors for clean, rapid subscriber drop installation.
Fiber Splice Enclosures	Built for low-loss splicing in high-density metro and access networks.
Cable Fault Repairs	Provides reliable, accurate splicing for fast and durable fault restoration in the field.
Core Network Builds	Delivers ultra-low-loss splicing in long-haul and metro aggregation points.

HARDWARE ADVANTAGES



4 seconds


The Fastest Splicing Time

Boost your productivity with splice times as fast as 4 seconds. Perfect for high-volume work where every second counts.



Improved Lighting

Enhanced internal and external lighting ensures clear visibility, even in dark or outdoor environments.



9 seconds

Pressure Heating Technology

With advanced pressure heating, shrink time is cut to just 9 seconds - fast, reliable, and built for efficiency.



Rapid Response Time

A fast, user-friendly touchscreen makes splicing smooth and simple - no fuss, just performance.




Versatile Fiber Holder

Easily switch between standard and loose-tube fibers with a flexible holder that adapts to your job.



Increased Energy Efficiency

Work longer without interruption. The View 5X maximizes battery performance, allowing more splicing cycles per charge - keeping you powered through the day.

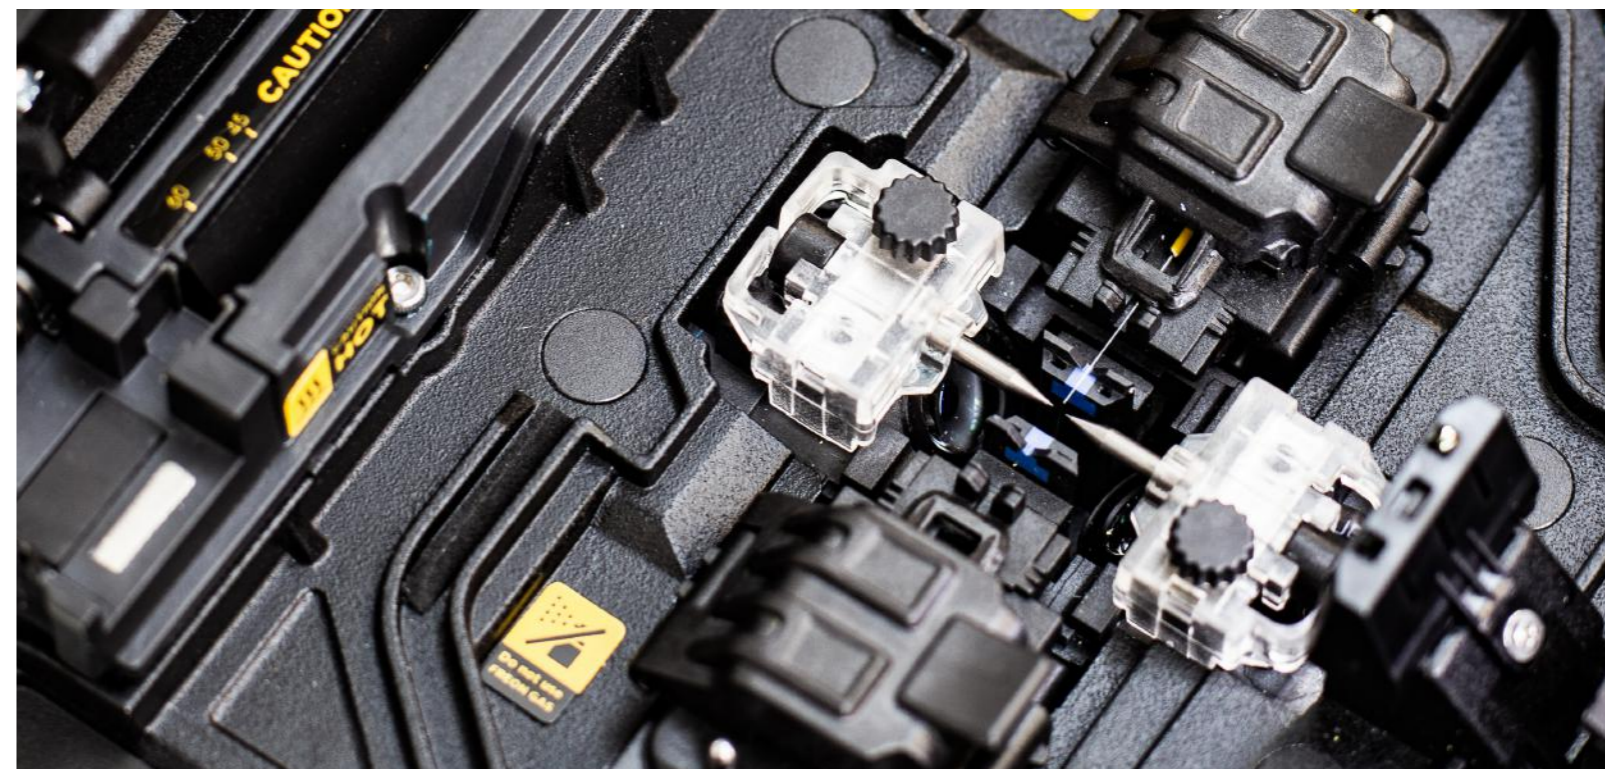

Smarter Operations, Seamless Connectivity


In today's fast-paced digital landscape, INNO Instrument's View Pro Manager (VPM) delivers the power to manage your fusion splicing operations smarter and faster. This cloud-based platform works seamlessly with our View Pro series, giving you live visibility, remote control, and instant access to critical data - anytime, anywhere.

VPM centralizes your team's workflow with intuitive job and task management, real-time splice data, and automatic splice image, offering detailed results and estimated loss values at a glance. Features like live messaging and service request tools improve communication and enable remote troubleshooting directly from the splicer screen.

Advanced tools such as AI-powered preventive maintenance, geolocation and tracking, and robust anti-theft protection ensure your assets are performing at their highest potential and are always secure.

Combined with supervisor-level access control and powerful reporting and analytics, VPM gives you the clarity to lead and the data to decide.

View Pro Manager isn't just about managing devices - it's about empowering your entire operation with smarter, faster, and safer performance.

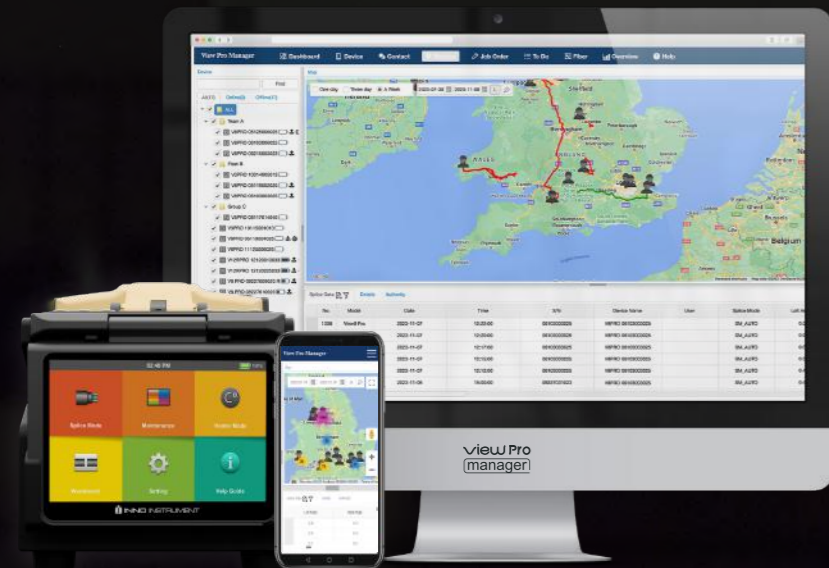

IoT & GPS Modules Embedded


SIM-card Connectivity

Real-Time Control and Data



SCAN QR CODE
To find more about VPM
www.INNOinstrument.com

OUR UNIQUE METHOD

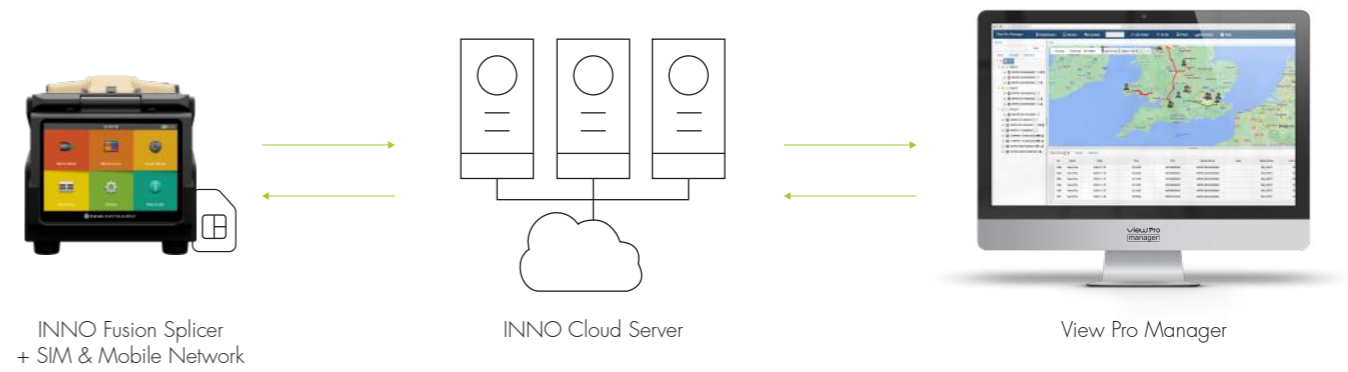

The VPM solution stands out with its unique connectivity method, relying on mobile networks and GPS. This innovative approach enables automatic data synchronization without the need for user intervention, offering a hassle-free experience.

No extra accessories required

No need for WiFi or Hotspot Network

Instant data transfer and GPS reporting

No user intervention – Auto connection

View Pro Manager (VPM) is built for everyone - from individuals to large enterprises - offering scalable, intuitive tools that fit any operation. Whether you need real-time splice data, remote support, or advanced analytics, VPM delivers the right features to match your needs and elevate your workflow.



KEY FEATURES

	Real-time Splice Data	Access and store detailed splice records and other technical details in real-time.
	Splice Image Sync	Auto-sync splice images with cleave angles and loss estimates.
	Full Access Control	Manage permissions with supervisor-mode.
	Anti-theft Protection	Lock, track, and protect devices with secure remote controls.
	Geolocation & Tracking	Monitor current and past device locations.
	Job & Task Management	Assign and track tasks with live location sharing for smooth team coordination.
	Preventive Maintenance	Get real-time equipment health alerts powered by AI.
	Live Messaging	Send direct messages to splicers in the field for better communication.
	Service Request	Submit instant diagnostics to INNO support for fast, reliable help.

WORKING TRAY

The Working Tray is built for fiber optic professionals who need a reliable, organized workspace wherever the job takes them. It securely holds your splicer and cleaver, fits seamlessly in the carrying case and lifts out easily - helping you stay organized and ready for the job.

Whether you're on the ground, a rooftop, or up a pole, its durable strap and stable design let you work hands-free with confidence. With smart compartments for your IPA bottle, splice protectors, and essential tools, everything stays within reach and ready. Placed on the case, it transforms into a sturdy mobile worktable - boosting efficiency and convenience in the field.

Field tested by technicians

Reduces set up and pack up time

Keeps your workflow clean, stable and efficient

INNO Fusion Splicer

INNO Cleaver

Durable Carrying Case

Accessories

Strap Compatible Design

Working Tray

Detachable Compartment

Presentation only

KEY FEATURES OF INNO WORKING TRAY

Working Tray

Stable, portable platform. Fits in the carry case without disturbing tools

Space for Fiber Strippers

Dedicated slots for strippers - organized and ready to go

Cleaver Mount

Secure cleaver placement

Shoulder strap

Hands-free mobility, perfect for pole and rooftop work

Detachable Container

Removable container for splice protectors, wipes and small tools

IPA Bottle Pocket

Integrated bottle holder

Flat Tray Surface

Doubles as a stable table top



INNO CARRYING CASE

Length: 480mm
Width: 315mm
Height: 205mm

480mm



205mm



315mm



view5x



SCAN QR CODE
Check more about **View 5X**



www.INNOinstrument.com

@INNOinstrument

support@innoinstrument.com